


# Command COM5-COM6

Integrated intelligent detector/photocells

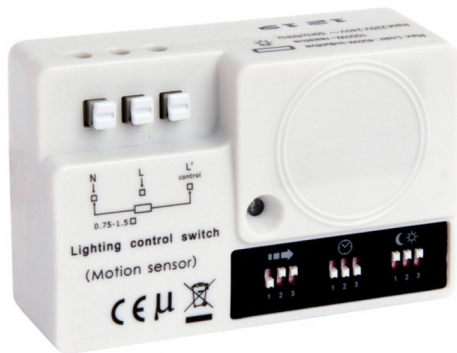

COM 6

## Overview

### Command 5

- Integrated detector
- Uses active microwave technology
- 360° detection
- Maximum range of 12m Ø (based on 6m mounting height)
- Detection area can be reduced by selecting the combination on a DIP switch to maximise performance in specific applications between 10 - 100%
- 5 seconds to 30 minutes time delay
- Look for the COM icon

### Command 6

- Integrated detector
- Programmable via the COMAP or COMPTC programmer
- Regulating photocell ensures minimum maintained light level taking into account the contribution from the adjacent luminaires and daylight (COM6Y only)
- Maximum range of 6m Ø (based on 2.5m mounting height)
- 5 min – 35 min time delay including 10 second walk test
- Remote switching via hand held controller
- Can control in a primary and secondary arrangement - contact our
- Technical Desk for further information
- Look for the COM icon

### Order Codes

Please see individual luminaire pages for order codes

