

# command connect microwave detector

- All detectors supplied with 3m lead and plug
- Maximum recommended mounting height 3m
- Detectors to be programmed using one a handheld programmer; COMCTHP or COMCTLCDHP (supplied separately)
- Detectors can be controlled using handheld controller COMCTHC (supplied separately)
- Recessed microwave detectors with time and lux level switching or daylight dimming
- Maximum range of 12m-16m Ø (based on 2.8m mounting height)

## Switching (4 pole)


COMCTSRG

- Presence/absence detection
- Infrared override
- Powers up to 10A of fluorescent lighting
- Time delay 10s – 99m

## DALI Dimming (6 pole)

COMCTYRG

- Presence/absence
- Infrared override
- Powers up to 10A of fluorescent lighting
- Scene setting and recall
- Controls up to 20 DALI dimming ballasts if relay not enabled or 10 if relay is enabled
- Time delay 10s – 99m

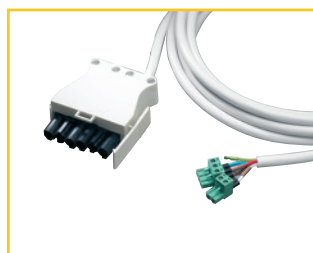


3m lead and plug for switching detectors (supplied)



3m lead and plug for DALI dimming detectors (supplied)

## Dimensions



| Version             | Ø  | H  | CAØ |
|---------------------|----|----|-----|
| COMCTSRG / COMCTYRG | 76 | 64 | 64  |

## Order Codes

COMCTSRG

Microwave switching presence/absence detector


COMCTSRG

COMCTYRG

Microwave DALI dimming presence/absence detector

COMCTYRG

## Detection Pattern

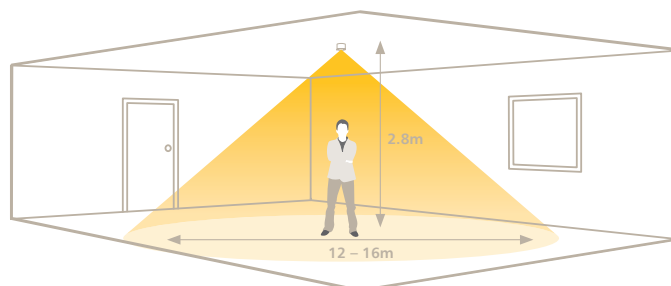

Area of high sensitivity      Area of lower sensitivity

Range is approximate at maximum sensitivity