

command connect / directional microwave detector

- All detectors supplied with 3m lead and plug
- Maximum recommended mounting height 3m
- Detectors to be programmed using a handheld programmer; COMCTHP or COMCTLCDHP (supplied separately)
- Detectors can be controlled using handheld controller COMCTHC (supplied separately)

Switching (4 pole)


COMCTSRE

- Tilting presence/absence
- Powers up to 10A of fluorescent lighting
- Maximum range of 25m (based on 2.6m mounting height)
- Time delay 10s – 99m

DALI Dimming (6 pole)

COMCTYRE

- Tilting presence/absence
- Powers up to 10A of fluorescent lighting
- Maximum range of 35m (based on 2.6m mounting height)
- Controls up to 20 DALI dimming ballasts if relay not enabled or 10 if relay is enabled
- Time delay 10s – 99m




3m lead and plug for switching detectors (supplied)



3m lead and plug for DALI dimming detectors (supplied)

Dimensions



Version	Ø	H	CAØ
COMCTSRE / COMCTYRE	85	92	74

Order Codes


COMCTSRE

Tilting microwave switching presence/absence detector **COMCTSRE**

COMCTYRE

Tilting microwave DALI dimming presence/absence detector **COMCTYRE**

Detection Pattern - Corridor Mode

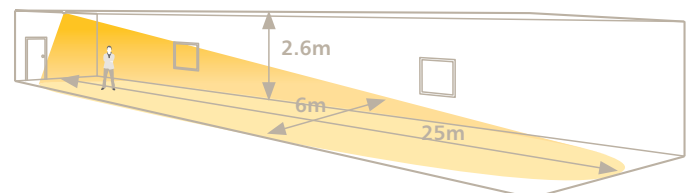

Area of high sensitivity Area of lower sensitivity

Range is approximate at maximum sensitivity