

command connect PIR detector

- All detectors supplied with 3m lead and plug
- Maximum recommended mounting height 3m
- Detectors to be programmed using a handheld programmer; COMCTHP or COMCTLCDHP (supplied separately)
- Detectors can be controlled using handheld controller COMCTHC* (supplied separately)
- Recessed PIR detection with time and lux level switching or daylight dimming
- Maximum range of 7m Ø (based on 2.8m mounting height)

Switching (4 pole)

COMCTSRA*

- Presence detection
- Powers up to 6A of fluorescent lighting
- Time delay 10s – 30m

COMCTSRB


- Presence/absence detection
- Infrared override
- Powers up to 10A of fluorescent lighting
- Time delay 10s – 99m

DALI Dimming (6 pole)


COMCTYRC

- Presence/absence detection
- Scene setting and recall
- Powers up to 10A of fluorescent lighting
- Controls up to 20 DALI dimming ballasts if relay not enabled or 10 if relay is enabled
- Time delay 10s – 99m

* COMCTSRA cannot be controlled using handheld controller COMCTHC




3m lead and plug for switching detectors (supplied)

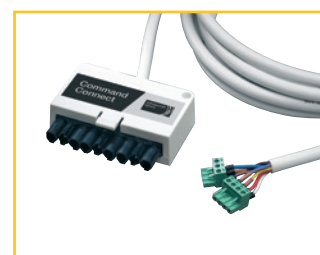

3m lead and plug for DALI dimming detectors (supplied)

Dimensions



Version	Ø	H	CAØ
COMCTSRA / COMCTSRB / COMCTYRC	76	64	64

Order Codes

COMCTSRA

PIR switching presence detector

COMCTSRA

COMCTSRB

PIR switching presence/absence detector


COMCTSRB

COMCTYRC

PIR DALI dimming presence/absence detector

COMCTYRC

Detection Pattern

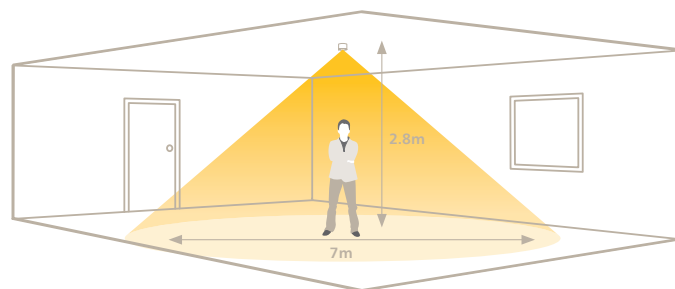

Area of high sensitivity Area of lower sensitivity

Range is approximate at maximum sensitivity