



LIFE P LED

Recessed picture lighting system



Whitecroft
lighting




Blossom - PD



Autumn 1 - PB

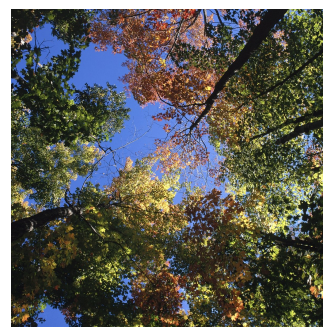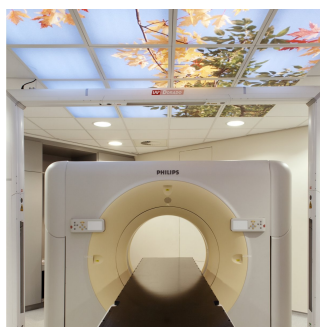

Autumn 2 - PC

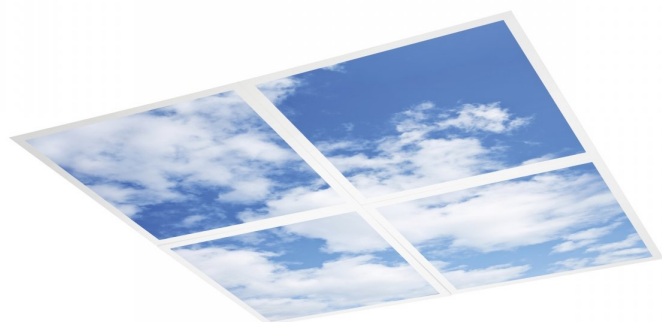

Optics

- Polycarbonate diffuser, with printed image
- A selection of images are available to enhance and define the space
- Positively retained framed diffuser
- IP44
- 40W per luminaire

Body

- Steel body finished white
- For installation in Exposed Tee, or plasterboard ceilings
- Separate frame required for installation into plasterboard ceilings
- Slim body profile
- DALI as standard

Order codes

Life P

		B50		
		L70	L80	L90
Life P	LFDY24*	>100k	68k	33k

*Change the order suffix dependent on configuration and printed image

Configuration

Configuration	Code
1 x 1	C1
1 x 2	C2
1 x 3	C3
2 x 2	C4
2 x 3	C6

**For configuration lay outs, please see application image

Images

Image	Code
Sky	PA
Autumn 1	PB
Autumn 2	PC
Blossom	PD

Examples

Example	DALI
C4 configuration with Sky	LFDY24C4-PA
C1 configuration with Autumn 1	LFDY24C1-PB

All codes require configuration and image suffix
Special configurations and images available on request


Accessories

Description	Code
Plasterboard Frame	TESPBF

LED Performance

Colour Temp	RA (CRI)	Life expectancy	Colour consistency
4000K	>80	L80(50,000hrs)	MacAdam 3 SDCM

Dimensions

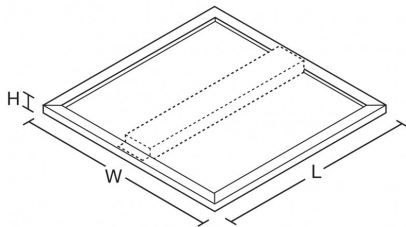

L	W	H	KG
596	596	27	4.2

To Specify

Square LED 600mm x 600mm panel luminaire system for feature lighting, with printed diffuser and slim line steel body – as Whitecroft Lighting LIFE P LED

Application images

