

# Mirage LED IP65

Ceiling recessed LED luminaire for outdoor applications



## Optics

- Light output options:
  - 2500 lumens, 21W - 4000K
  - 2325 lumens, 21W - 3000K
- Wide beam symmetrical distribution
- 3000 and 4000K colour temperature options

---

## Body

- Die-cast aluminium body and bezel
- IP65, IK10 rated protection
- Finished in Anthracite Grey
- Clear flat acrylic diffuser in bezel
- Matt anodised aluminium reflector
- Supplied complete with driver contained within main body
- To suit ceiling thickness 5 – 50mm
- Dali dimming driver as standard


## Order codes

Description	Code	LL/CW	L80	L90
LED 4000K, 2500 lumen, 21W	M6Y14K	119	>100k	>100k
LED 3000K, 2325 lumen, 21W	M6Y13K	110	>100k	>100k

## LED Performance


Colour Temp	RA (CRI)	Colour consistency
4000K	>80	MacAdam 3 SDCM

## Dimensions

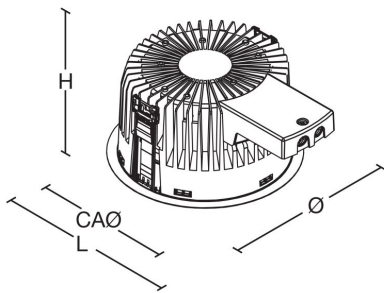

L	H	KG	Ø	Cut Aperture
270	147	2.3	220	210

## Photometric Performance

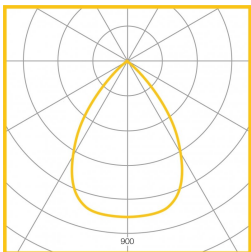

21W 2500 Lumen  
LOR = 100.0%

## To Specify

IP65/IK10 Recessed LED downlighter with aluminium body, clear diffuser and DALI driver. With wide beam distribution – as Whitecroft Lighting MIRAGE LED IP65.

---