

Mirage Wallwasher



Small aperture recessed circular or square wallwasher for accent lighting



SQ81 White



SQ81 White



C81 White



C81 Black

Optics

- Light output options ranging from 508 lumens to 788 lumens
- Choice of 3000K or 4000K colour temperature
- Moulded polycarbonate reflector with medium beam distribution
- Low glare black internal baffle with soft white option
- Wallwash optics

Body

- Die-cast white aluminium bezel
- Fixed output or Dali driver included
- Integral IP44 protective lens as standard
- White Bezel RAL Colour: RAL9003
- Class 2 double insulated wiring
- Ambient operating temperature between -25°C to $+25^{\circ}\text{C}$

Order codes

C81 Circular Wallwasher, Fixed Output, Black

B50				
Description	Order Code	LL/CW	L70	L80
508 lumen (6.2W) 3000K	LRWMBH13K	81.9	60K	49K
537 lumen (6.2W) 4000K	LRWMBH14K	86.6	60K	49K
658 lumen (8.2W) 3000K	LRWMBH23K	80.2	55K	35K
695 lumen (8.2W) 4000K	LRWMBH24K	84.8	55k	35k

C81 Circular Wallwasher, Fixed Output, White

B50				
Description	Order Code	LL/CW	L70	L80
551 lumen (6.2W) 3000K	LRWMWH13K	88.9	60K	49K
582 lumen (6.2W) 4000K	LRWMWH14K	93.9	60K	49K
713 lumen (8.2W) 3000K	LRWMWH23K	87	55K	35K
753 lumen (8.2W) 4000K	LRWMWH24K	91.8	55K	35K

SQ81 Square Wallwasher, Fixed Output, Black

B50				
Description	Order Code	LL/CW	L70	L80
508 lumen (6.2W) 3000K	LSWMBH13K	81.9	60K	49K
537 lumen (6.2W) 4000K	LSWMBH14K	86.6	60K	49K
658 lumen (8.2W) 3000K	LSWMBH23K	80.2	55K	35K
695 lumen (8.2W) 4000K	LSWMBH24K	84.8	55K	35K

SQ81 Square Wallwasher, Fixed Output, White

B50				
Description	Order Code	LL/CW	L70	L80
592 lumen (6.2W) 3000K	LSWMWH13K	95.5	60K	49K
609 lumen (6.2W) 4000K	LSWMWH14K	98.2	60K	49K
746 lumen (8.2W) 3000K	LSWMWH23K	91	55K	35K
788 lumen (8.2W) 4000K	LSWMWH24K	96.1	55K	35K

Options

DALI Dimming


Replace 'H' with 'Y'

ie. LRWMBY13K

LED Performance


Colour Temp	RA (CRI)	Colour consistency
3000K / 4000K	>80	MacAdam 3 SDCM

Dimensions

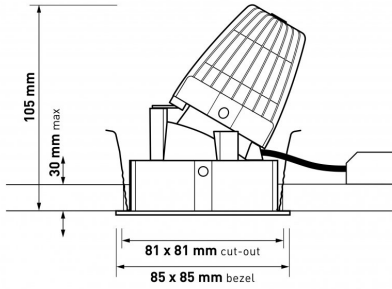

VERSION	L	W	H	KG	Ø	CAØ
Circular			105	0.4	85	81
Square	85	85	105	0.4		

Photometric Performance

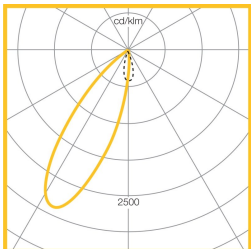

8.2W, 695 lm
LOR = 100%

To Specify

Recessed LED, low glare architectural wallwasher, with circular or square cast aluminium bezel and polycarbonate reflector. Integral light engine and driver, IP44 rated as standard – as Whitecroft Lighting MIRAGE WALLWASHER