


**CONNECT BATTERIES  
BEFORE SUSPENDING**



**TECHNICAL SUPPORT**  
**Telephone: 0161 331 5700**  
**E-mail: [technical@whitecroftlight.com](mailto:technical@whitecroftlight.com)**  
**<http://www.whitecroftlighting.com/>**

**STRIP CABLE 150 mm**  
**STRIP WIRE 10 mm**

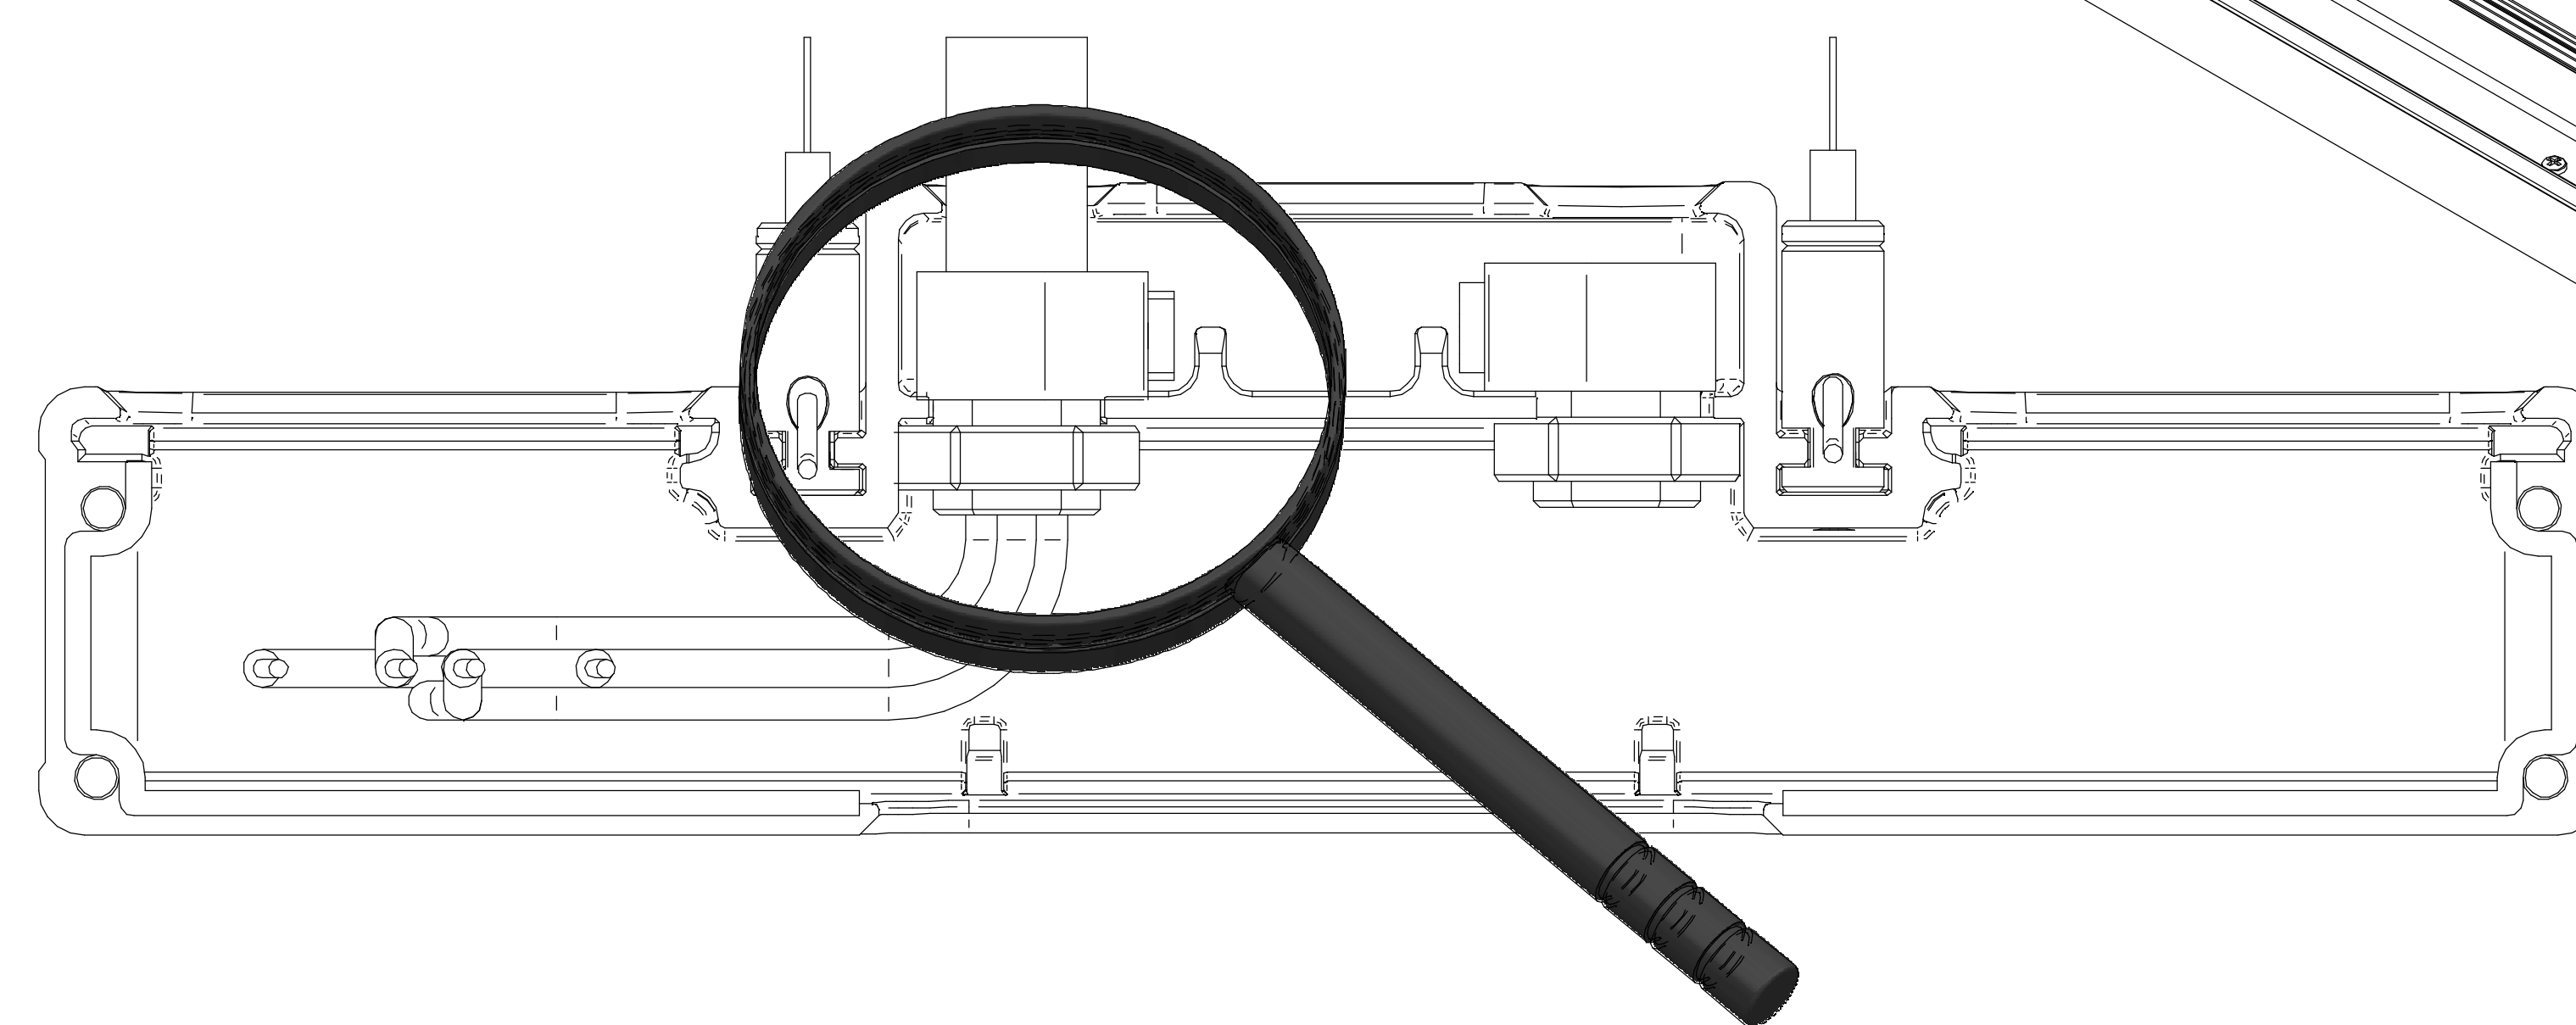


SPECIFICATION

Lamp type	LED
Finish	RAL 9003/9005/9006
Materials	Acrylic / Mild Steel / Aluminium
Weight	1212mm Fitting - Std 6.4kg, Emin 7.2kg. 1492mm Fitting - Std 7.7kg, Emin 8.4kg. 1772mm Fitting - Std 8.9kg, Emin 9.5kg.
Supply	240V AC, 50/60Hz
Power	High Output Fittings = 66W/88W/108.5W Low Output Fittings = 26.5W/36.5W/44.5W
Operating temp	0-30C
Connection	2.5mm² input terminal block
Ingress protection	IP20

GENERAL INFORMATION


- 1) A qualified electrician, in accordance with IEE wiring regulations should carry out connection to mains wiring.
- 2) This unit must be EARTHED.
- 3) Ensure that the rated voltage and frequency requirements are compatible with the available mains supply.
- 4) Cleaning of reflectors and lenses should be carried out using clean, soft and lint free cloths and anti-static cleaning fluid
- 5) Do not carry out high voltage insulation test, i.e. 500/1000v this may damage internal components.

SUSPENSION CENTRES + OVERALL DIMENSIONS

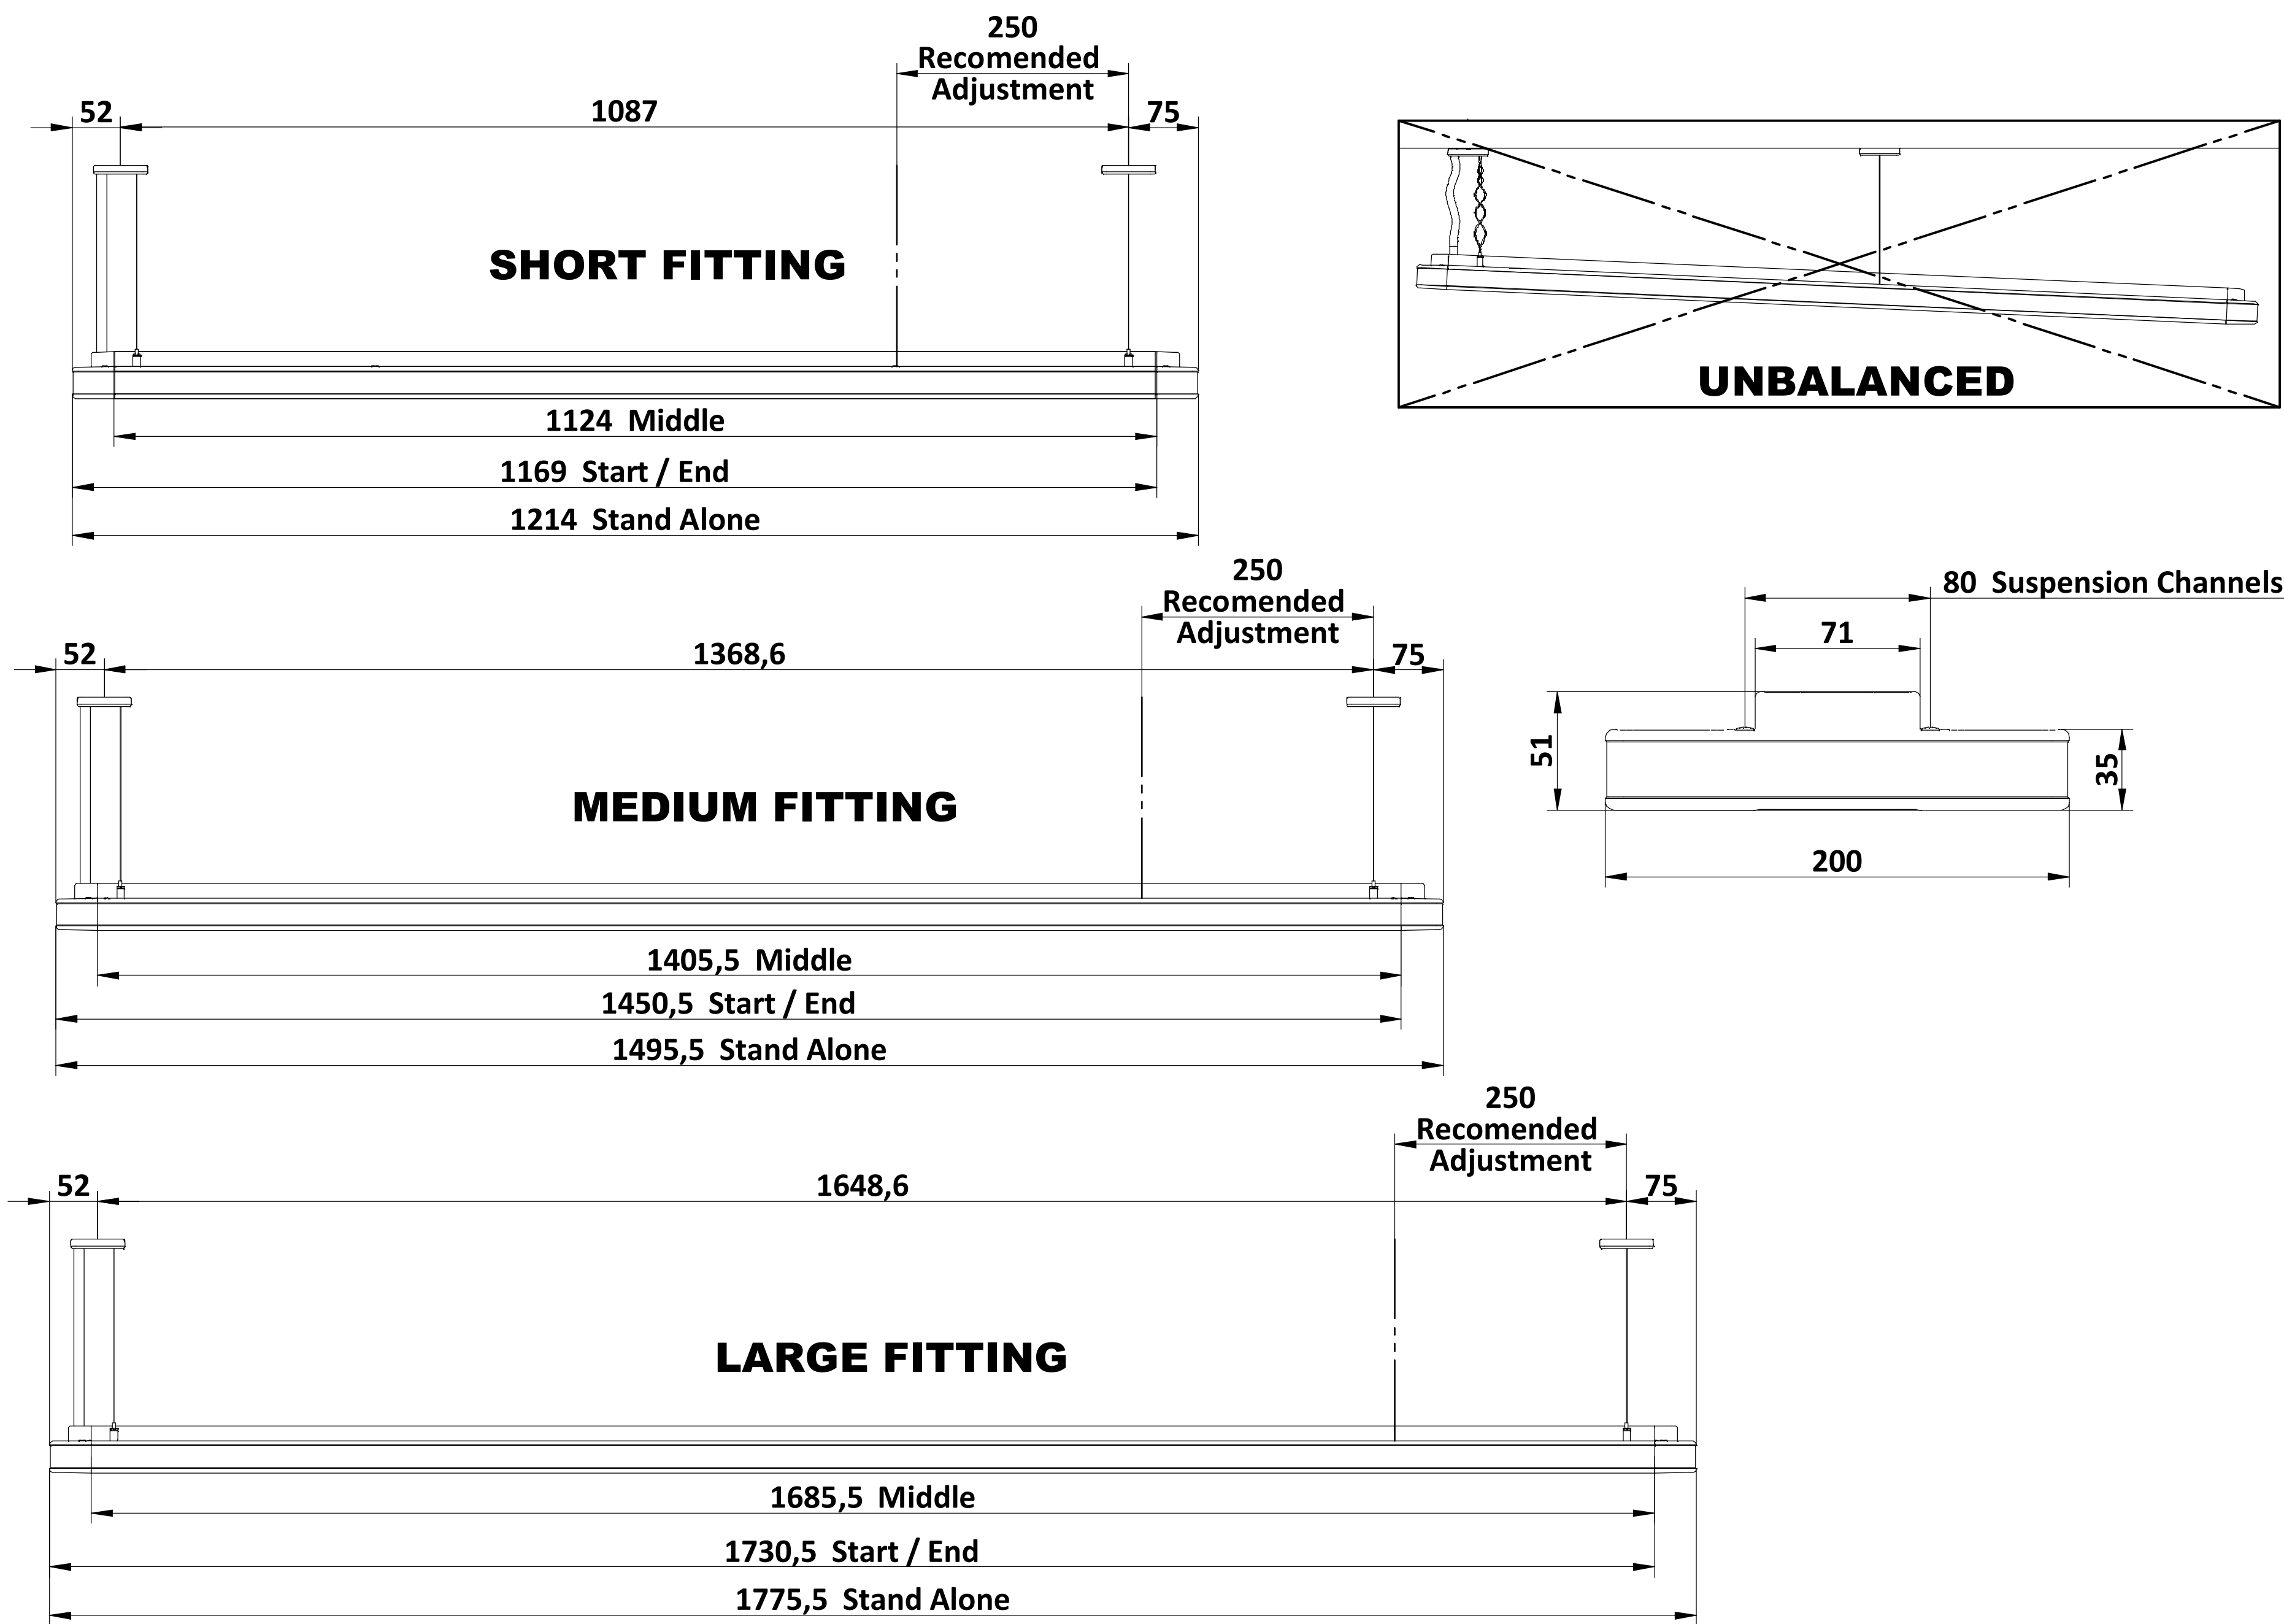

PK/GNPD48IL

March 2013 - Rev C

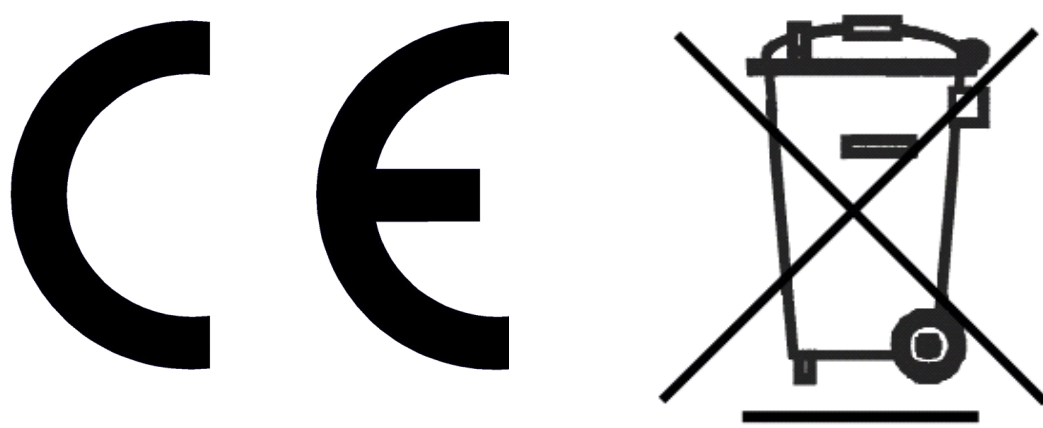

Whitecroft Lighting Limited

Burlington Street, Ashton-under-Lyne, Lancashire OL7 0AX  
Telephone +44 (0)870 5 087 087 Facsimile: +44 (0)870 5 084 210  
Registered No. 3848973 England Registered Office: As above