

Broadwalk L180

180 degree bollard for outdoor applications



Optics

- Light output options:
 - 549 lumens, 4000K, 11.5W (600 & 1100mm high versions)
 - 1800 lumens, 4000K, 27W (2400mm high version)
 - 3000K LED option
- 180 degree distribution
- UV stabilised polycarbonate opal diffuser

Body

- Die cast and extruded aluminium
- Coated for corrosion and saline environment resistance
- For outdoor applications within 3km of the coast, an enhanced paint finish can be offered on request
- IP66 IK08 rated protection
- Finished in Graphite Grey RAL7024 or Silver/grey RAL9007
- Supplied with plug and socket and fixing bolts
- Fixed output as standard, DALI dimming option
- Suitable for ambient temperatures between -30°C to +50°C

Order codes

Graphite grey		LL/CW	L70
LED 600mm high	BLF1814KG	47	40k
LED 1100mm high	BLF1824KG	47	40k
LED 2400mm high	BLF1834KG	67	40k


Options

SILVER/GREY RAL 9007	Replace G with S	i.e BLF1814KS
3000K LED	Change '4k' to '3K'	i.e. BLF1813KG
DALI dimming	Add 'Y' after 'BLF'	i.e. BLFY1814KG

LED Performance


Colour Temp	RA (CRI)	Colour consistency
4000K	>70	MacAdam 4 SDCM

Dimensions

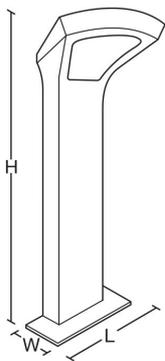

VERSION	L	W	H	KG
600mm high	300	220	600	6.2
1100mm high	300	220	1100	8.2
2400mm high	300	220	2400	13

Photometric Performance



11.5W 549 Lumen
LOR = 100.0%

To Specify

IP66 LED bollard with die cast aluminium body in 600, 1100 and 2400mm high options. With 180 degree distribution – as Whitecroft Lighting BROADWALK L180.
