

IP40



## Optics

- Slimline channel of LEDs to illuminate in coves and underneath cabinets
- 4000K or 'Warm' white 2700K colour temperature
- UV resistant opal white polycarbonate diffuser
- Extruded aluminium body complete with fixing brackets
- Driver and starter lead supplied separately from LED strip

## Order codes

### Coveline - 2700K

Coveline - 2700K	Fixed Output	LL/CW	L70
135mm, 108lm (2W)	CL127K	54	50K
260mm, 238lm (4W)	CL227K	60	50K
505mm, 477lm (8W)	CL327K	60	50K
1000mm, 939lm (16W)	CL427K	59	50K
1495mm, 1467lm (24W)	CL527K	61	50K

Lead

Lead	Fixed Output
3m starter lead (for connection from driver to starting strip)	CLST3M

Coveline - 4000K

Coveline - 4000K	Fixed Output	LL/CW
135mm, 125lm (2W)	CL14K	54
260mm, 255lm (4W)	CL24K	60
505mm, 520lm (8W)	CL34K	60
1000mm, 1040lm (16W)	CL44K	59
1495mm, 1550lm (24W)	CL54K	61

Drivers


Fixed output, 20W	CNSLD20
Fixed output, 100W	CNSLD100
Fixed output 180W	CNSLD180
Dali dimming 80W	CSFDY80
Dali dimming 150W	CSFDY150

LED Performance

Colour Temp	RA (CRI)	Colour consistency
2700K	>80	MacAdam 3 SDCM

--

# Dimensions

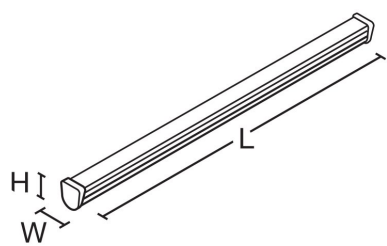

VERSION	L	W	H	KG
108lm / 125lm	135	20	20	0.4
238lm / 255lm	260	20	20	0.8
477lm / 520lm	505	20	20	1.2
939lm / 1040lm	1000	20	20	2.4
1467lm / 1550lm	1495	20	20	3.6

## To Specify

IP40 linear LED strip luminaire with extruded aluminium body complete with pre-wired cables and connectors – as Whitecroft Lighting COVELINE