

Rink Suspended

Architectural suspended luminaire ideal for workspace lighting



Rink Suspended White



Rink Suspended Black

Overview

Rink has a curved optical form with triple layer 'V' optic. The subtle introduction of depth enhances glare control at high angles and the up-light halo and comfort of the optic bring visual interest and perceived depth into the space.

Optics

- 3 light outputs:
 - 4000K silver/white - 3285 lumens, 26W
 - 4000K silver/white - 4338 lumens, 35W
 - 4000K silver/white - 5250 lumens, 42W
 - 3000K and black versions have slightly reduced outputs, see specific details below
- 4000 and 3000K colour temperatures
- > Ra80 colour rendition
- Unique 3 layer V-optic with 10mm depth bringing life into the luminaire and the space
- High quality 'glass like' appearance
- 80/20% down/uplight ratio


Lifetime Data			
Version	L70B50	L80B50	L90B50
All	>100K	>100K	58K

Emergency Outputs		
Version	3000K	4000K
All	215 lumens	222 lumens

Body

- Fabricated sheet steel body
 - Slimline 44mm visible side section
 - A choice of textured paint finishes:
 - Silver RAL 9006
 - White RAL 9003
 - Black RAL 9005
 - DALI driver as standard
 - Integral Organic Response sensor option
 - Supplied with pre-assembled suspension kit
 - Fully integral emergency inverter and batteries:
 - 3 hour standard
 - 3 hour COMEPS DALI addressable
-

Dimensions

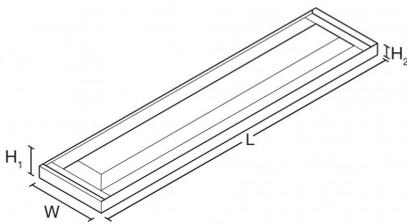

VERSION	L	W	H1	H2	KG	KG(EM)
Suspended	1195	269	75	44	8.2	8.4
