

# asymmetric wallwasher

compact fluorescent  
recessed & surface  
wall washer



## Optics

- Lamp options:
  - 1 or 2 x 55W TC-L
- Asymmetric semi-specular reflector
- Recommended spacing:  
750mm from vertical surface on 1.8m centre

## Body


- Steel body finished white
- Universal body for surface or recessed mounting
- Compatible with the following ceiling types:
  - Exposed T 15mm and 25mm flat
- BESA fixings at rear for surface mounting



## Order Codes

Asymmetric Wallwasher  
TC-L 1 x 55W  
TC-L 2 x 55W

HF Gear  
ASYU155S  
ASYU255S

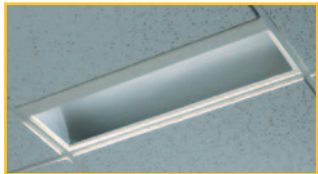


Recessed Mount

## Lamp Performance

|              |         |           |
|--------------|---------|-----------|
| Wattage      | IL@25°C | Lamp Life |
| 1 x 55W TC-L | 4800    | 20,000hrs |

## Dimensions

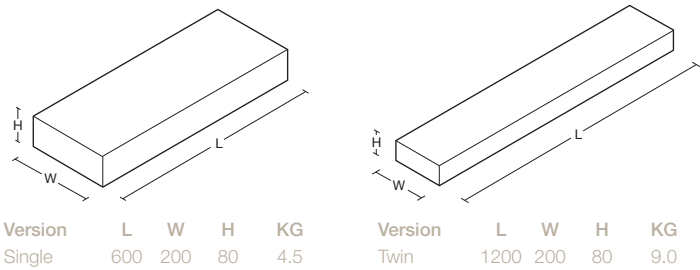

## Photometric Performance



1 x 55W TC-L  
• LOR = 53.5%

## To Specify

Universal fully recessed/surface compact fluorescent asymmetric luminaire. Semi-specular parabolic low glare louvre – as Whitecroft Lighting ASYMMETRIC WALLWASHER