


broadwalk bollard

Exterior: IP55 Amenity bollard




DIMENSIONS

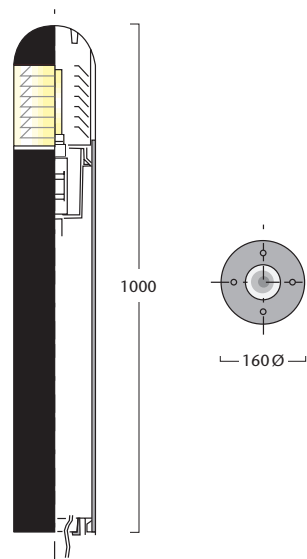

PHOTOMETRY

1 x 70W SON-E Lamp

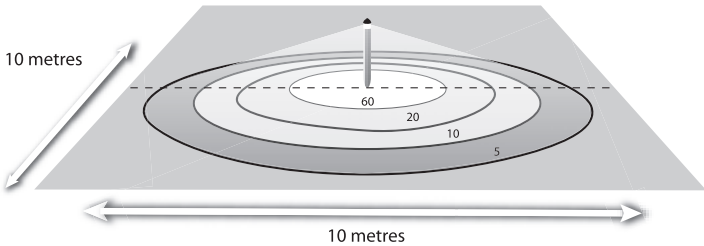

SCALE FACTORS

LAMP TYPE	SCALE FACTOR
70W SON-E	1.0
50W MBF-U	0.30
70W HQI-E	0.93
42W TC-T	0.53

APPLICATION

- Parking areas
- Paths and walkways
- Parks and gardens
- Public squares
- Retail precincts

SPECIFICATION

- Lamp options:
 - 50W MBF-U
 - 70W SON/HQI-E
 - 42W TC-T
- IP55 ingress protection
- Corrosion resistant die cast aluminium alloy head, base and pot
- Extruded aluminium body
- Finished with a UV stabilised polyester powder coating
 - Black RAL 9005
- Clear lens in vandal resistant UV stabilised polycarbonate
- Anodised high purity aluminium reflector
- Detachable gear and reflector assembly for easy maintenance
- Weatherproof durable silicone gasket
- Fixings in stainless steel
- Supplied with lamp
- Fixing to ground via 4 x M8 foundation bolts (not supplied)
- Class 1 protection



LAMP PERFORMANCE MATRIX

WATTAGE	IL@25°C	LAMP LIFE
1 x 50W MBF-U	1800	20,000
1 x 70W SON-E	5600	
1 x 70W HQI-E	6000	
1 x 42W TC-T	3200	

WEIGHT

VERSION	WEIGHT
All	8.5Kg

MOUNTING

SOIL TYPE	MINIMUM DIA OF HOLE	MOUNTING CONCRETE DEPTH BELOW GROUND
Poor	350mm	300mm
Average	280mm	300mm
Good	250mm	300mm

The above is offered as guidance only, Whitecroft does not accept responsibility for the installation

ORDER CODES – BROADWALK BOLLARD

IP AMENITY BOLLARD

LAMP SUPPLIED	LUMINAIRE
50W MBF	BRK50M
70W SON-E	BRK70S
70W HQI-E	BRK70H
42W TC-T	BRK42F

To specify state:

IP55 bollard with corrosion resistant die cast aluminium alloy head, base and pot and extruded aluminium body, finished RAL 9005. Clear lens in vandal resistant UV stabilised polycarbonate, anodised high purity aluminium reflector, and detachable gear and reflector assembly for easy maintenance to suit 50W MBF, 70W SON-E, HQI-E and 42W TC-T lamps – as Whitecroft Lighting BROADWALK BOLLARD