

broadwalk quad

Exterior: IP65 Amenity recessed wall luminaire

APPLICATION


- Almost any commercial or public area
- Building exteriors
- Steps

SPECIFICATION

- Lamp: 18W TC-D
- IP65 ingress protection
- Corrosion resistant die cast aluminium alloy body and faceplate
- Four faceplate options – plain, grill, downlight, up:downlight
- Finished with a UV stabilised polyester powder coating – Black RAL 9005
- Vandal resistant UV stabilised polycarbonate diffuser
- Integral switchstart control gear
- Anodised high purity aluminium reflector
- Weatherproof silicone rubber gasket
- M20 x 1.5mm cable entry (cables entry gland 7.5mm to 13.5mm diameter)
- Fixings in stainless steel
- Lamp not supplied
- Supplied complete with block-out



BRQ18UD



BRQ18G



BRQ18D




BRQ18P




DIMENSIONS


Broadwalk Quad – Up : Down

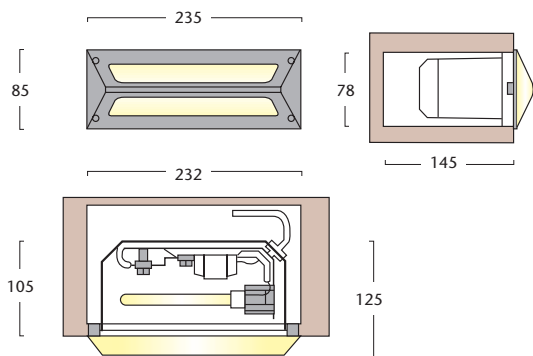


Broadwalk Quad – Grill

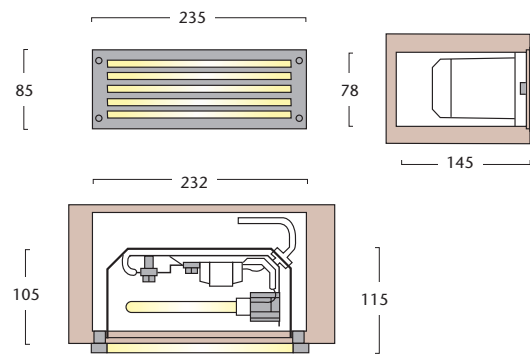

Broadwalk Quad – Down

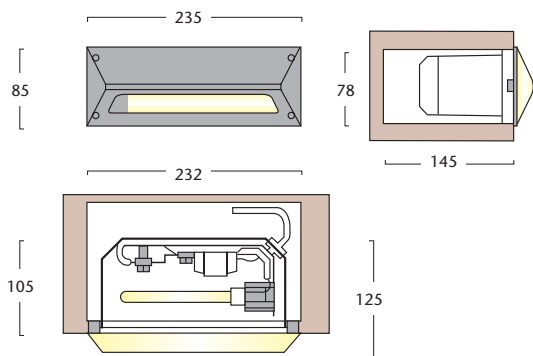


Broadwalk Quad – Plain

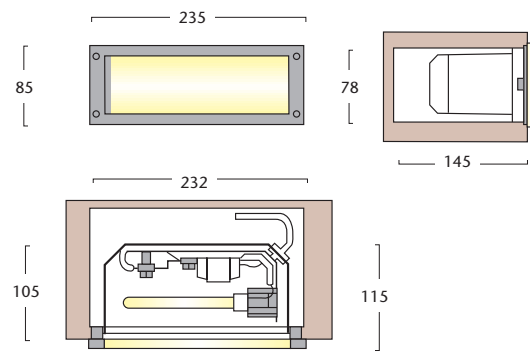

PHOTOMETRY

1 x 18W TC-D lamp – BRQ18P

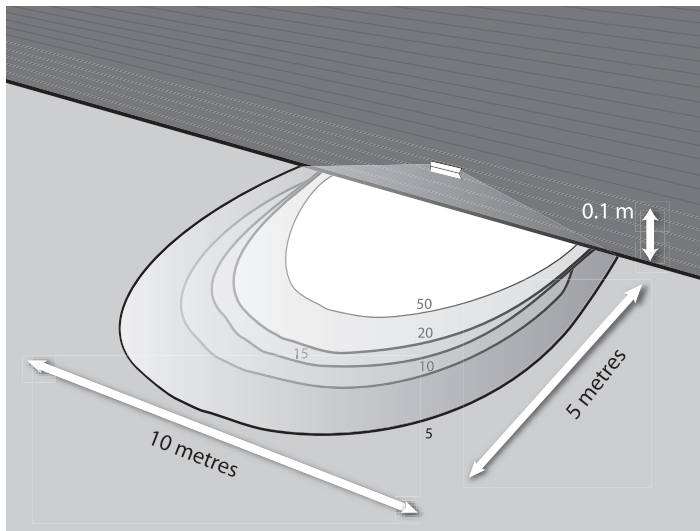

LAMP PERFORMANCE MATRIX

WATTAGE	IL@25°C	LAMP LIFE
18W TC-D*	1200	12,000

* 2 PIN LAMP

WEIGHT

LUMINAIRE	WATTAGE	WEIGHT
BRQ18P	18	2.0Kg
BRQ18G	18	2.0Kg
BRQ18D	18	2.5Kg
BRQ18UD	18	2.5Kg

ORDER CODES – BROADWALK QUAD

IP65 AMENITY RECESSED WALL LUMINAIRE

SUPPLIED LESS LAMP	FACEPLATE STYLE	LUMINAIRE
18W – TC-D	Plain	BRQ18P
18W – TC-D	Grill	BRQ18G
18W – TC-D	Downlight	BRQ18D
18W – TC-D	Up:Downlight	BRQ18UD

To specify state:

IP65 18W TC-D recessed wall luminaire with corrosion resistant die cast aluminium alloy body and faceplate with 4 options – plain, grill, downlight, and up:downlight finished Black to RAL 9005. Vandal resistant UV stabilised polycarbonate diffuser and integral control gear – as Whitecroft Lighting BROADWALK QUAD