

Broadwalk Quad

Wall recessed luminaire for outdoor applications

Whitecroft
lighting

IP54

LED



Grille

Optics

- Light output options:
 - 144 lumens (4000K - 3.3W, grille)
 - 171 lumens (4000K - 3.3W, smooth)
- Plexiglass diffuser
- Smooth optic or grille options
- 3000K and 4000K LED

Body

- UV stabilised nylon
- Die cast aluminium frame
- Coated for corrosion, saline and UV resistance
- For outdoor applications within 3km of the coast, an enhanced paint finish can be offered on request
- IP54 rated protection
- Finished in graphite grey
- Closest RAL Colour: Grey RAL7024

Order codes

Description	Code	LL/CW	L70
LED 144 lumen (3.3W) Grille	BQG14K	43	50k
LED 171 lumen (3.3W) Smooth	BQS14K	52	50k


Options

3000K LED Change '4K' to '3K' ie. BQG13K

LED Performance


Colour Temp	RA (CRI)	Colour consistency
4000K	>70	MacAdam 4 SDCM

Dimensions

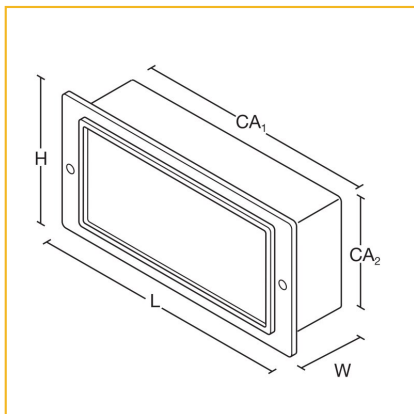

L	W	H	KG	Cut Aperture	Cut Aperture 2
223	89	114	0.6	215	110

Photometric Performance



Grille 3.3W 144
Lumen
LOR = 100.0%

To Specify

IP54 Wall recessed LED luminaire with die cast aluminium frame. With grille or smooth front optic – as Whitecroft Lighting
BROADWALK QUAD
