


Optics

- Lamp options:
 - 2 x 28/54W T5 multi watt control gear
- Circular polycarbonate diffuser
- The solid translucent polycarbonate diffuser guarantees even light dispersion and fades out the shape of the lamp

Body

- Suspended
- Maximum suspension drop 2000mm
- Extruded plain anodised aluminium body
- Slim anodised aluminium bracket holds a polycarbonate diffuser in which the lamps are housed

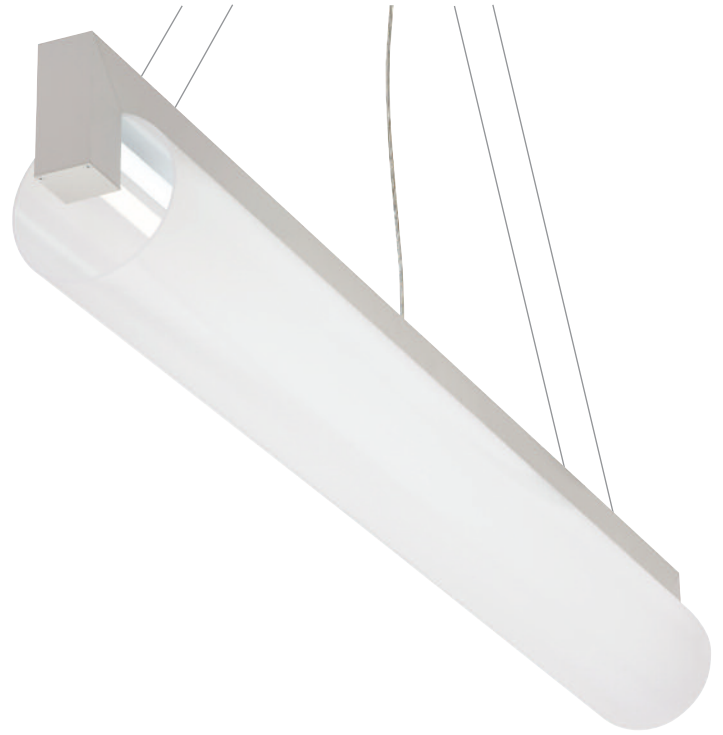


ORDER CODES

Buuze	HF Gear
T5 2 x 28/54W	WACO880.03.2.20.1
Options	
POLYCARBONATE END CAPS	WACO880.08.0.00.0
ANODISED ALUMINIUM END CAPS	WACO880.09.0.20.0

LAMP PERFORMANCE


Wattage	IL@25°C	Lamp Life
1 x 28W T5	2600	24,000hrs
1 x 54W T5	4450	24,000hrs

DIMENSIONS



L	Ø	H	KG
1186	133	175	2.9

PHOTOMETRIC PERFORMANCE



Utilisation Factors UF(F)

Room Reflectance			Room Index		
C	W	F	1.00	3.00	5.00
0.70	0.50	0.20	0.61	0.82	0.89

TO SPECIFY

Suspended linear luminaire with an anodised aluminium body and circular polycarbonate diffuser – as Whitecroft Lighting BUUZE

