


AMBIENT: Architectural luminaire

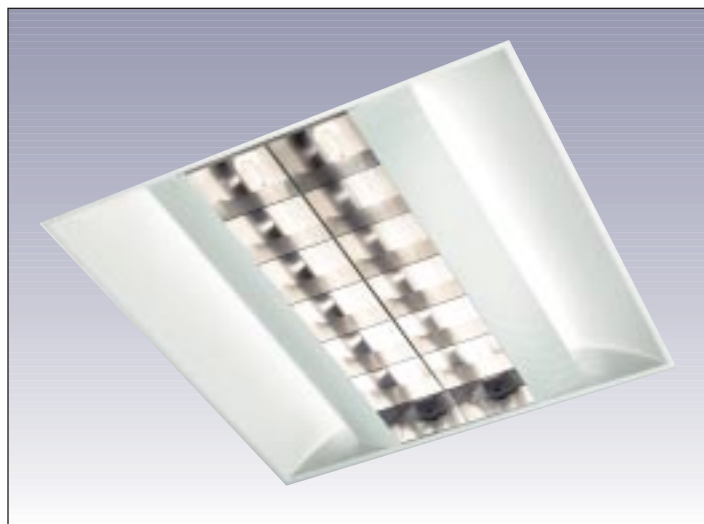


- Lamp options: – 2 x 55W TC-L
- Optic incorporates a micro dot zero iridescent semi-specular louvre between perforated gull wings
- Designed to rest above 15 and 25mm exposed T ceilings
- Fully flanged rolled body with end plates tightly jointed for a rigid construction, finished White
- Supplied less lamps

- Easytest – integral self test version available
see page 94
- 3 hour integral maintained emergency

Cascade
2 x 55W TC-L lamps
Illuminance = 800 lux
2.4m x 3.0m spacing

Maintenance	0.8
Reflectance	70/50/20
Ceiling Height	2.7m
Working Plane	0.8m

- LOR = 65.7%
- SHR MAX = 1.52



UTILISATION FACTORS UF(F)										SHR NOM=1.50	
Room Reflectance			Room Index								
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.48	0.52	0.56	0.59	0.63	0.65	0.67	0.69	0.71
0.50	0.30	0.20	0.42	0.47	0.52	0.55	0.59	0.61	0.63	0.65	0.67
0.00	0.00	0.00	0.38	0.43	0.47	0.50	0.53	0.56	0.57	0.59	0.60

TC-L RECESSED LUMINAIRE

HIGH FREQUENCY

SUPPLIED LESS LAMP	STANDARD	EMERGENCY
2 x 55W TC-L	CSDWH255RLV	CSDWH255RLVEMIN

EASYTEST OPTION *Add suffix to order codes above*

/ET  Integral self test, i.e. CSDWH255RLV/ET