

centurion PG54

Exterior: IP54 Perimeter security lighting bulkhead

APPLICATION

- Security lighting
- Building perimeters
- Pedestrian access
- Subways and tunnels
- Industrial storage units


SPECIFICATION

- Lamp Options:
 - 70W HQI-E or SON-E
 - 150W HQI-E or SON-E
- Class 1 protection against electric shock
- IP54 ingress protection
- Black die cast aluminium body and diffuser frame
- Diffuser lens in heat resistant prismatic toughened glass
- Mounting can be direct to the ceiling or via a BESA box fixing (do not mount on combustible surfaces)
- Hinged front for ease of lamp change
- 3 x 20mm cable entry options in sides and top of fitting
- Integral photocell option
- Timed ignitor on HQI lamp
- Magnetic control gear complete with thermal cut out
- Ambient operating temperature range -40°C to +25°C
- Supplied with lamp




PHOTOMETRY

1 x 150W SON-E Lamp

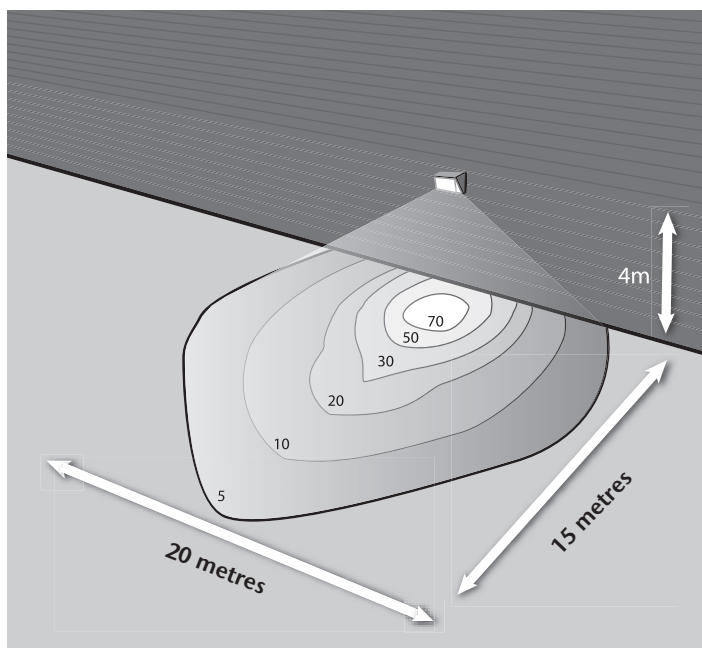

DIMENSIONS

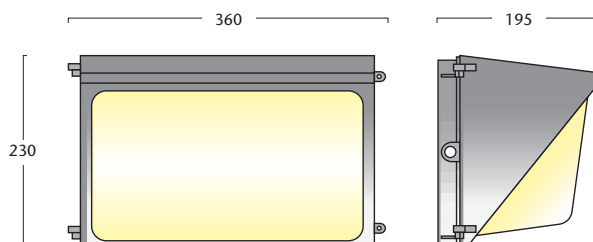

LAMP PERFORMANCE MATRIX

WATTAGE	IL@25°C	LAMP LIFE
1 x 70W HQI-E	6000	12,500
1 x 150W HQI-E	13000	12,500
1 x 70W SON-E	5600	28,500
1 x 150W SON-E	14000	28,500

SCALE FACTORS

LAMP TYPE	SCALE FACTOR
150W SON-E	1.0
70W SON-E	0.40
150W HQI-E	0.93
70W HQI-E	0.43

ORDER CODES – CENTURION PG54

IP54 PERIMETER SECURITY LIGHTING BULKHEAD

LAMP SUPPLIED	STANDARD VERSION	PHOTOCELL VERSION
1 x 70W HQI-E	CENG70H	CENG70HPC
1 x 150W HQI-E	CENG150H	CENG150HPC
1 x 70W SON-E	CENG70S	CENG70SPC
1 x 150W SON-E	CENG150S	CENG150SPC

To specify state:

IP54 perimeter lighting bulkhead to be suitable for direct surface or BESA box mounting. Body and frame to be in die cast aluminium finished Black front. Heat resistant toughened glass prismatic diffuser lens, hinged for ease of lamp change, 70 & 150W HQI-E or SON-E lamp options with timed ignitor – as Whitecroft Lighting CENTURION PG54

QuickLink

CENPG

Go