

Centurion PP65 LED

IP65 perimeter security lighting bulkhead



Optics

- Light Output Options:
 - 1364 lumens, 13.3W
 - 2877 lumens, 28W
- Emergency Output (BLF):
 - All variants - 110 Lumens (Florin Head)

Body

- IP65
- DALI as standard
- 4000K
- Black polycarbonate visor and die-cast aluminium base
- Clear UV stabilised prismatic polycarbonate diffuser with Miro 5 reflector mounted internally
- Two 20mm diameter knock-out options for cable entry gland at either side of the base
- Ambient operating temperature ranges:
 - Non Emergency, -30°C to +25°C
 - Emergency, -5°C to + 25°C
- Integral emergency options in standard 3 hour, Easytest and COMEPS

Order codes

Centurion PP65 LED

Centurion PP65 LED	DALI	3hr Emergency	LL/CW
1364 lumen, 13.3W	CENPL0Y	CENPL0YEM	102
2877 lumen, 28W	CENPL1Y	CENPL1YEM	102


Options

COMEPS	Add suffix /EP	i.e CENPL0Y/EP
EASYTEST	Add suffix /ET	i.e CENPL0Y/ET

LED Performance


Colour Temp	RA (CRI)	Life expectancy	Colour consistency
4000K	>70	L80(100,000hrs)	MacAdam 5 SDCM

Dimensions

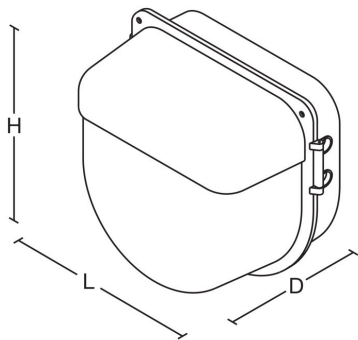

L	D	H	KG	KG(EM)
350	212	330	6.2	6.6

Photometric Performance



4000K 28W 2877
Lumen
LOR = 100.0%
SHR MAX = 1.48

To Specify

IP65 perimeter security LED lighting bulkhead suitable for direct surface mounting with a 4 point fixing employing two key slots and 2 locking screws. Black polycarbonate visor and die-cast aluminium base with UV stabilised prismatic polycarbonate diffuser and Miro 5 reflector – as Whitecroft Lighting CENTURION PP65 LED
