

centurion Q

Exterior: IP54 Ceiling mounted security lighting bulkhead

APPLICATION

- Security lighting
- Multi storey car parks
- Covered walkways
- Subways and tunnels

SPECIFICATION

- Lamp Options:
 - 70W HQI-T or SON-T
 - 150W HQI-T or SON-T
- Class 1 protection against electric shock
- IP54 ingress protection
- Black die cast aluminium body
- UV stabilised clear polycarbonate prismatic diffuser
- Mounting can be direct to the ceiling or via a BESA box fixing (do not mount on combustible surfaces)
- 3 x 20mm diameter side cable entry options
- Ambient operating temperature range -40°C to +25°C SON, -20°C to +25°C HQI
- Timed ignitor
- Magnetic control gear complete with thermal cut out
- Supplied with lamp



QuickLink

CENQ


Go






PHOTOMETRY

1 x 150W SON-T Lamp

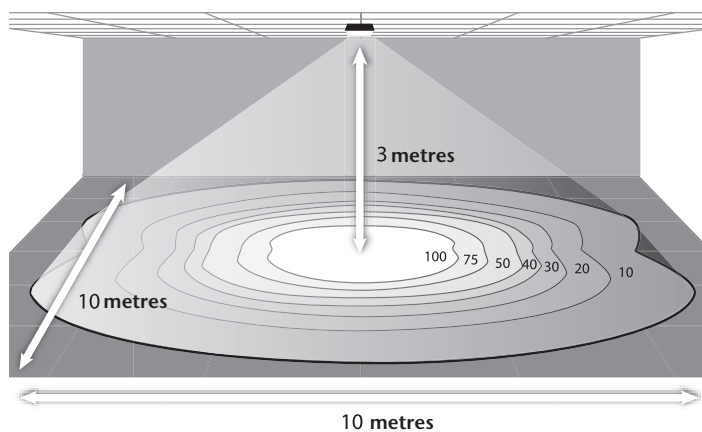

DIMENSIONS

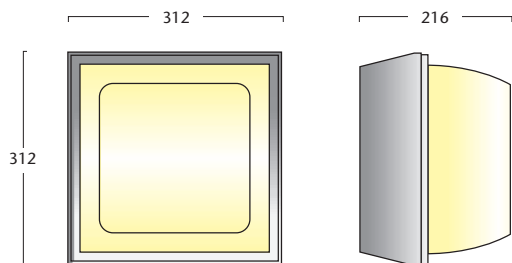

SCALE FACTORS

LAMP TYPE	SCALE FACTOR
150W SON-T	1.0
70W SON-T	0.41
150W HQI-T	0.90
70W HQI-T	0.36

LAMP PERFORMANCE MATRIX

WATTAGE	IL@25°C	LAMP LIFE
1 x 70W HQI-T	5200	12,500
1 x 150W HQI-T	13000	12,500
1 x 70W SON-T	5900	28,500
1 x 150W SON-T	17500	28,500

ORDER CODES – CENTURION Q

IP54 CEILING MOUNTED SECURITY LIGHTING BULKHEAD

LAMP SUPPLIED	STANDARD VERSION
1 x 70W HQI-T	CENQ70H
1 x 150W HQI-T	CENQ150H
1 x 70W SON-T	CENQ70S
1 x 150W SON-T	CENQ150S

To specify state:

IP54 ceiling mounted lighting bulkhead, suitable for direct surface or BESA box mounting. Body to be in die cast aluminium finished Black with 3 x 20mm diameter side cable entry options and timed ignitor with clear UV stabilised clear polycarbonate diffuser 70 & 150W HQI-T or SON-T lamp options – as Whitecroft Lighting CENTURION Q