

conical columns

Decorative conical steel lighting column

Features

- 4, 5, 6, 8 & 10m high columns
- Planted root or flange plate mounting
- Post top direct mounting 60mm spigot
- Single and twin outreach arm options with 5° tilt
- Galvanised finish with bitumen treated base to 250mm above ground level
- Optional coloured thermoplastic coating for additional protection, extended life and enhanced aesthetics
- Supplied with blank base board and locking door
- Suitable for inland and coastal locations

Order Codes

Planted root columns	Outreach arm compatible	Direct Post top compatible
4m	CC4PRXXM	CC4PR60M
5m	CC5PRXXM	CC5PR60M
6m	CC6PRXXM	CC6PR60M
8m	CC8PRXXM	CC8PR60M
10m	CC10PRXXM	CC10PR60M

Options

FLANGE PLATE MOUNTED	Replace PR with FM i.e. CC4FM60M
BLACK THERMOPLASTIC COATING	Add suffix /BLK i.e. CC4PR60M/BLK
SILVER THERMOPLASTIC COATING	Add suffix /SLVR i.e. CC4PR60M/SLVR

Outreach Arm


	Code
Single 500mm for 4-6m 'XX' outreach column	CBK500-461
Single 1000mm for 8-10m 'XX' outreach column	CBKCC1000-8101
Twin 500mm for 4-6m 'XX' outreach column	CBK500-462
Twin 1000mm for 8-10m 'XX' outreach column	CBKCC1000-8102

Floodlight Bracket


Single 500mm for 4-10m 'XX' outreach column	CBKFA500-461
Twin 1000mm for 4-10m 'XX' outreach column	CBKFA1000-462

Accessories

M16 J-Bolt kit for flange plate, size 1 to suit columns heights 4-6m	CFMKIT1
M24 J-Bolt kit for flange plate, size 2 to suit columns heights 8-10m	CFMKIT2

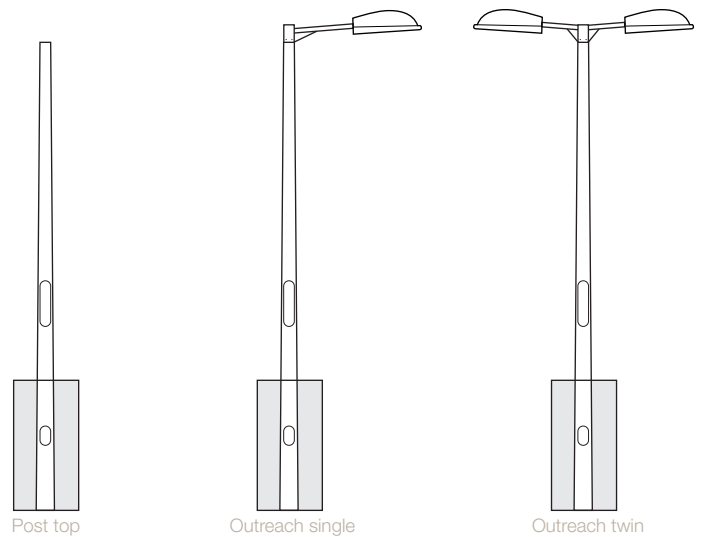

Dimensions

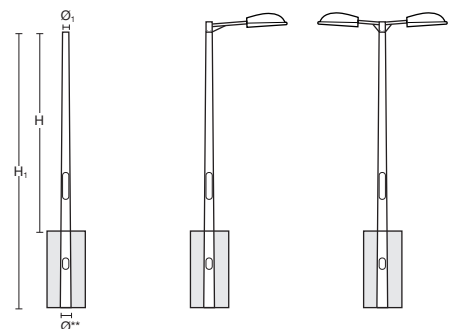

Version	Ø**	H	H ₁ *	Post Top Ø ₁	Outreach Ø ₁
4m	157	4000	4800	60	76
5m	175	5000	5800	60	76
6m	179	6000	7000	60	76
8m	212	8000	9200	60	76
10m	247	10000	11500	60	76

* H₁ (planted only)

** Diameter at ground level

To Specify

Decorative conical steel lighting column with planted root or flanged mounting plate. 4, 5, 6, 8, or 10m high suitable for post top (60mm spigot) or outreach bracket (76mm spigot). Galvanised finish with bitumen treated base. – as Whitecroft Lighting CONICAL COLUMN.