

tubular columns

Cost effective stepped tubular steel lighting column

Features

- 4, 5, 6, 8 & 10m high columns
- 12 & 15m high columns on request
- Planted root or flange plate mounting
- 60mm spigot adaptor option for post top direct mounting
- Single and twin outreach arm options with 5° tilt
- Galvanised finish with bitumen treated base as standard
- Optional coloured thermoplastic coating or painted finish for additional protection, extended life and enhanced aesthetics
- Supplied with blank base board and locking door
- Mid-hinged and conical versions on request
- Suitable for inland and coastal locations

Order Codes

Planted Root Columns

	Code
4m	CT4PRXXL
5m	CT5PRXXM
6m Medium duty*	CT6PRXXMD
6m Heavy duty**	CT6PRXXH
8m Medium duty *	CT8PRXXMD
8m Heavy duty**	CT8PRXXH
10m Medium duty *	CT10PRXXMD
10m Heavy duty**	CT10PRXXH

* Medium duty for single luminaires only

** Heavy duty for twin luminaires

Options

FLANGE PLATE MOUNTED	Replace PR with FM i.e. CT4 FM XXL
BLACK THERMOPLASTIC COATING	Add suffix /BLK i.e. CT4PRXXL/ BLK
SILVER FINISH	Add suffix /SLVR i.e. CT4PRXXL/ SLVR

Adaptors for Single Post Top Luminaire Direct Mounting

76-60mm for 4-6m column	COLRED76-60
89-60mm for 8m medium column	COLRED89-60
114-60mm for 10m medium column	COLRED114-60

Outreach Arm

Single 500mm for 4-6m column	CBK500-461
Single 500mm for 8m medium column	CBK500-81
Single 500mm for 10m medium column	CBK500-101
Twin 500mm for 4-6m column	CBK500-462
Twin 500mm for 8m heavy column	CBK500-82
Twin 500mm for 10m heavy column	CBK500-102


Floodlight Bracket

Single 500mm for 4-6m column	CBKFA500-461
Single 500mm for 8m medium column	CBKFA500-81
Single 500mm for 10m medium column	CBKFA500-101
Twin 1000mm for 4-6m column	CBKFA1000-462
Twin 1000mm for 8m heavy column	CBKFA1000-82
Twin 1000mm for 10m heavy column	CBKFA1000-102


Accessories

Fixing cradle for flange plate, size 1 to suit columns heights 4-6m	CFMKIT1
Fixing cradle for flange plate, size 2 to suit columns heights 8-10m	CFMKIT2

Outdoor

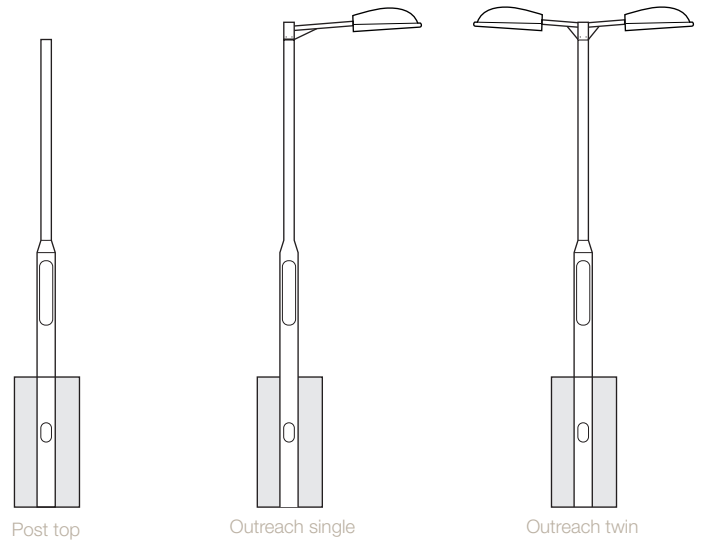

Dimensions

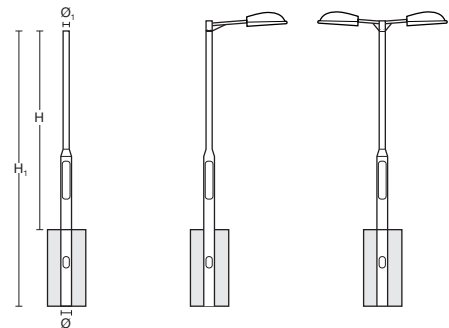

Version	Ø	H	H ₁ *	Spigot Ø	Shaft Ø
4m	140	4000	4800	76	76
5m	140	5000	5800	76	76
6m (Medium duty)	140	6000	7000	76	76
6m (Heavy duty)	168	6000	7000	76	89
8m (Medium duty)	168	8000	9200	76	89
8m (Heavy duty)	168	8000	9200	101	114
10m (Medium duty)	168	10000	11500	101	114
10m (Heavy duty)	168	10000	11500	127	140

* H₁ (planted only)

To Specify

Stepped tubular steel lighting column with planted root or flanged mounting plate. 4, 5, 6, 8, or 10m high suitable for post top or outreach arm mounting. Galvanised finish with bitumen treated base – as Whitecroft Lighting TUBULAR COLUMN.