

tubular columns

Cost effective stepped tubular steel lighting column

Features

- 4, 5, 6, 8 & 10m high columns
- Planted root or flange plate mounting
- Post top direct mounting 60mm spigot
- Single and twin outreach arm options with 5° tilt (compatible columns have larger spigot size)
- Galvanised finish with bitumen treated base to 250mm above ground level
- Optional coloured thermoplastic coating for additional protection, extended life and enhanced aesthetics
- Supplied with blank base board and locking door
- Mid-hinged versions available on request
- Suitable for inland and coastal locations

Order Codes

Planted root columns	Outreach arm compatible	Direct Post top compatible
4m	CT4PRXXL	CT4PR60L
5m	CT5PRXXM	CT5PR60M
6m	CT6PRXXH	CT6PR60MD
8m	CT8PRXXH	CT8PR60H
10m	CT10PRXXH	CT10PR60H

Options

FLANGE PLATE MOUNTED	Replace PR with FM	i.e. CT4FM60L
BLACK THERMOPLASTIC COATING	Add suffix /BLK	i.e. CT4PR60L/BLK
SILVER THERMOPLASTIC COATING	Add suffix /SLVR	i.e. CT4PR60L/SLVR

Outreach Arm


	Code
Single 500mm for 4-6m 'XX' outreach column	CBK500-461
Single 1000mm for 8m 'XX' outreach column	CBK1000-81
Single 1000mm for 10m 'XX' outreach column	CBK1000-101
Twin 500mm for 4-6m 'XX' outreach column	CBK500-462
Twin 1000mm for 8m 'XX' outreach column	CBK1000-82
Twin 1000mm for 10m 'XX' outreach column	CBK1000-102

Floodlight Bracket


Single 500mm for 4-6m 'XX' outreach column	CBKFA500-461
Single 500mm for 8m 'XX' outreach column	CBKFA500-81
Single 500mm for 10m 'XX' outreach column	CBKFA500-101
Twin 1000mm for 4-6m 'XX' outreach column	CBKFA1000-462
Twin 1000mm for 8m 'XX' outreach column	CBKFA1000-82
Twin 1000mm for 10m 'XX' outreach column	CBKFA1000-102

Accessories

M16 J-Bolt kit for flange plate, size 1 to suit columns heights 4-6m	CFMKIT1
M24 J-Bolt kit for flange plate, size 2 to suit columns heights 8-10m	CFMKIT2

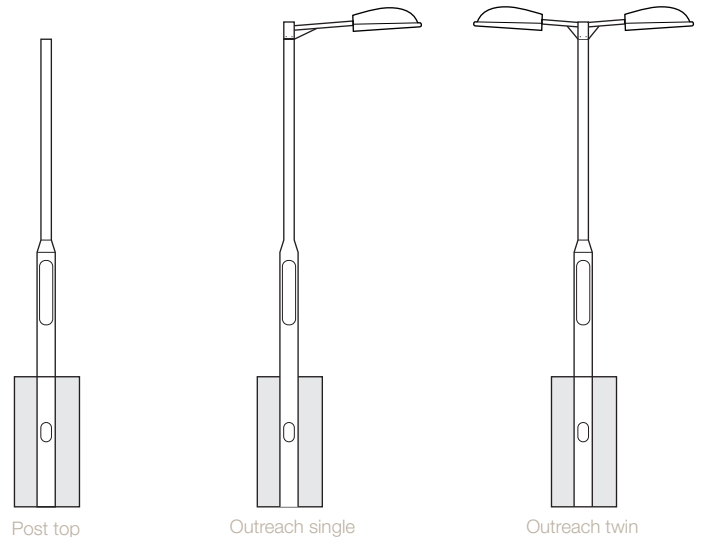

Dimensions

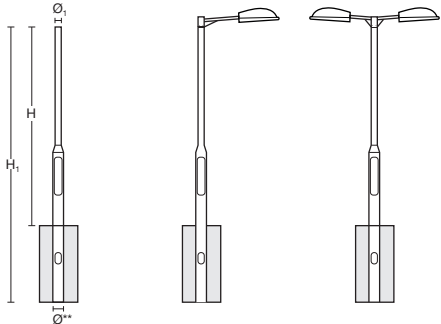

Version	Ø	H	H ₁ *	Post Top Ø ₁	Outreach Ø ₁
4m	140	4000	4800	60	76
5m	140	5000	5800	60	76
6m	140	6000	7000	60	76
8m	168	8000	9200	60	101
10m	168	10000	11500	60	127

* H₁ (planted only)

To Specify

Stepped tubular steel lighting column with planted root or flanged mounting plate. 4, 5, 6, 8, or 10m high suitable for post top (60mm spigot) or outreach bracket (larger spigot to suit). Galvanised finish with bitumen treated base – as Whitecroft Lighting TUBULAR COLUMN.