

DALI router

> weblink > **COMD2CR**

To further expand the flexibility of a DALI lighting control system, a 2 channel router is available. This gives the opportunity to address up to 128 devices from one router and is scalable to meet the needs of the largest installation as multiple routers can be networked.

128 ADDRESSES

- The DALI Router can address 64 devices on each of 2 channels, giving a wider range than an individual hub

SCALABLE


- DALI Routers can be linked together by Ethernet cable
- There is no limit to the number of routers used in a single installation, making the system infinitely scalable
- Each router can be assigned an IP address and can be linked into an existing computer network

BUILDING -WIDE FLEXIBILITY


- Each room can be configured independently for the requirements of the space, from simple PIR functionality for storage areas to complex scene-setting for meeting areas.
- Daylight harvesting can reduce energy consumption in open plan or cellular office environments
- Programming can be from a single point with PC-based software configuration. This can even be achieved remotely.



CONNECTIONS

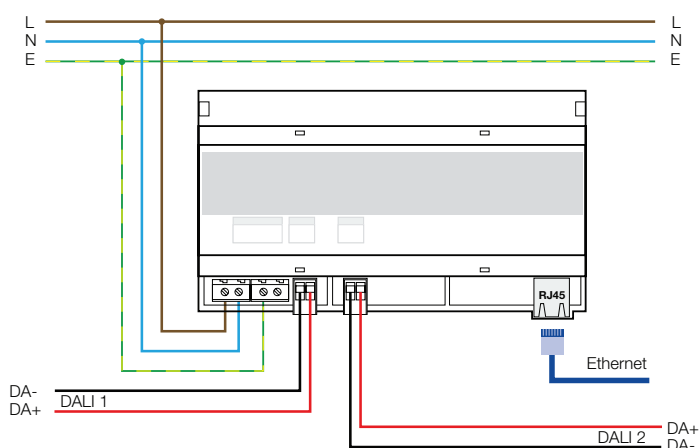

Typical multi floor and room configuration

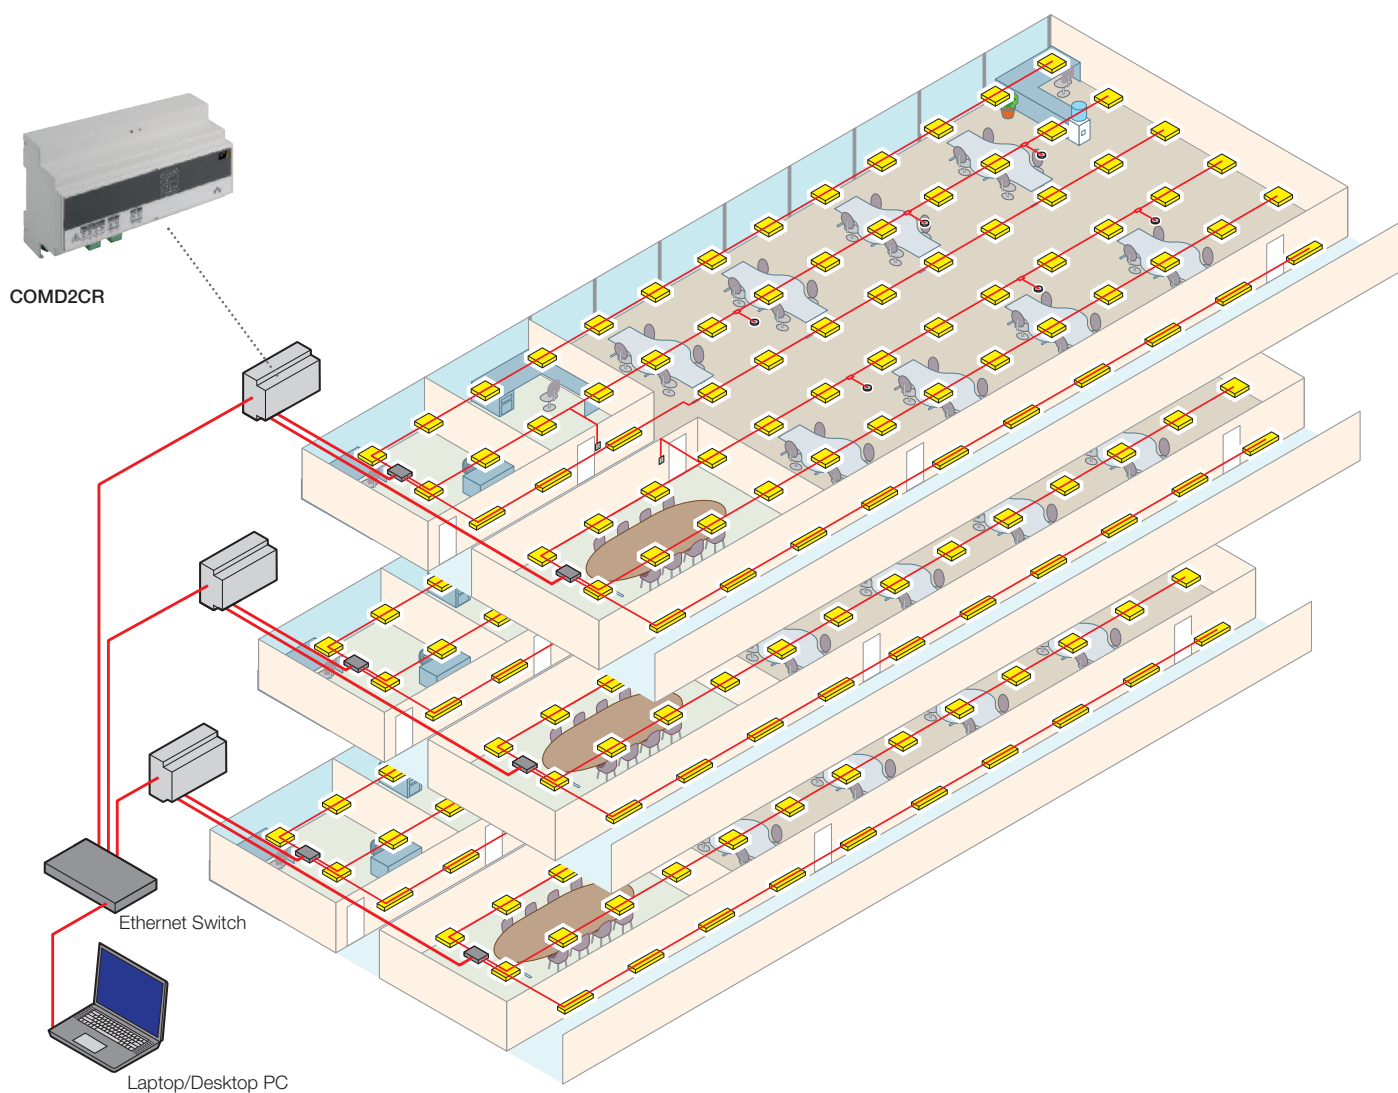


ORDER CODES

DALI Router

DALI Router

COMD2CR

DIMENSIONS



TO SPECIFY

DALI Router with 2 off 250mA channels.
Din rail mounting and ethernet port for
networking – as Whitecroft Lighting
COMD2CR