



Comfort Surface T5

Range Introduction

Release date: February 1st 2002


WHEN QUALITY MATTERS

From February 1st the Comfort Surface T5 will be available.

Based upon the catalogue Comfort Surface, the T5 version incorporates all the noted features of its counterpart:

Specification


- ♦ Lamp options:
 - High Efficiency - 28w & 35w T5
 - High Output - 54w T5
- ♦ Slim chamfered steel body (62mm deep) manufactured from 0.7mm Zintec steel.
- ♦ White polyester powder-paint finish - RAL9010.
- ♦ Injection moulded sprung end caps matched to body colour.
- ♦ BESA fixings to rear.
- ♦ 'F' mark rated.
- ♦ High frequency standard or regulating control gear as standard.
- ♦ Available with integral 3hr emergency and/or Command 3 Cube capability.
- ♦ Supplied less lamps.

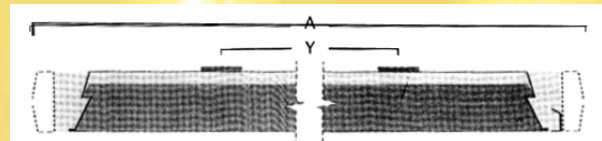

Lamp Ways	Dim A	Fixing Centres	BESA Centre
1x28w	1199	1040x120	600
2x28w	1199	1040x120	600
1x54w	1199	1040x120	600
2x54w	1199	1040x120	600
1x35w	1499	1340x120	600
2x35w	1499	1340x120	600

Louvres / Diffuser:

- ♦ Highly polished Clearlux, low iridescence – Cat2.200 or Low brightness louvres.
- ♦ Full perimeter flange reduces light spill.
- ♦ Flat top wedge.
- ♦ Positive louvre retention – by end caps.
- ♦ Extruded prismatic diffuser.

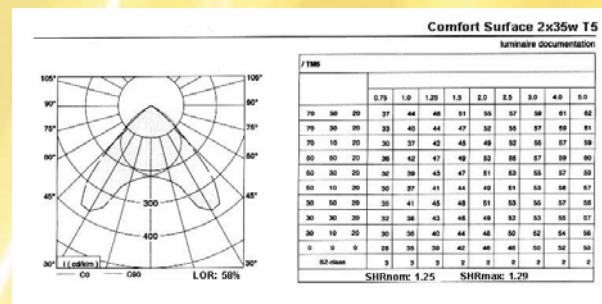

ORDER CODES

Standard	Lamp(s)	Emergency Version
CS128HW	1x28w T5	CS128HWEMIN
CS228HW	2x28w T5	CS228HWEMIN
CS154HW	1x54w T5	CS154HWEMIN
CS254HW	2x54w T5	CS254HWEMIN
CS135HW	1x35w T5	CS135HWEMIN
CS235HW	2x35w T5	CS235HWEMIN

For Low Brightness louvre replace **W** for **L** i.e. CS128HL.

For Prismatic Diffuser replace **W** for **D** i.e. CS128HD.

For 0-10v regulating gear replace **H** for **R** i.e. CS128RW.

For Command 3 option add suffix **/COM3** i.e.

CS128HW/COM3 (not available on diffuser option).

