



Javelin/Spear/Merlin

Command 3

Range Modifications



Release date: December 1st 2001

As from the 1st December the standard method of fixing Command 3 system into all Javelin, Spear and Merlin Cat2 louvred luminaires will become as shown below.

A Command 3 Cube is fitted to a standard louvre in all cases. A modified louvre (1 wedge subtracted) or machined in-fill section with extended body is not now required.

The Command 3 Cube (MS1200DI/S) is fitted to the louvre in-house, using punched Zintec bracket 25671-1-BK01 and 2off No4x3mm self-tapping screws - as per illustration.

For full mechanical fitting instruction see:
MS25671 – Merlin
MS25699 – Javelin & Spear

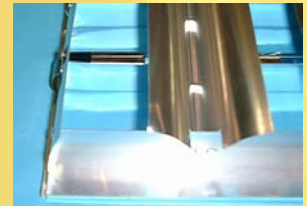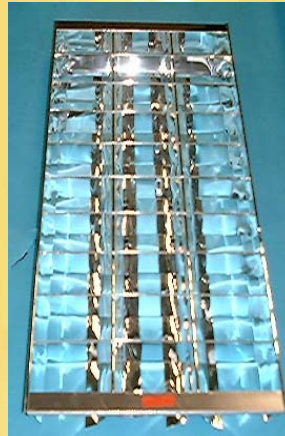

WHEN QUALITY MATTERS