

directional ultrasonic detector/photocell

> weblink > **COMRD**

- Uses ultrasonic detection technology
- Surface mounted directional detector
- 5-15 minute time delay including 5 second walk test
- Switches up to 10A of lighting
- Sensitive to respond to very small movements
- Detects movement in rooms up to 10m x 10m and up to 15m range along a corridor
- Measures daylight penetration and holds off luminaires if adequate daylight is present
- Adjustment controls accessible via side door for ON range, OFF range as well as OFF delay
- Maximum recommended mounting height 5m
- Semi recessed mounting kit available




ORDER CODES

Directional ultrasonic detector


Surface Mounting
Semi Recessed Mounting Kit

COMRD
COMRDSFK

DIMENSIONS



DETECTION RANGE

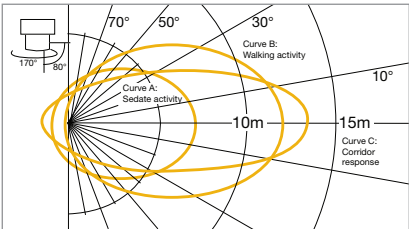

Detection footprint at 2.4m mounting height

Detector	Mounting type	Detector type	Detector range	Max ceiling height	Control method	Detection method	Occupancy type	Off delay	Daylight hold off	Daylight regulating	Programmable	Maximum load
Directional Ultrasound Detector COMRD	Surface	Directional	10m x 10m rooms and up to 15m corridors	5m	Switch live	Ultrasonic	Presence	5-15 min	Yes	No	Manual	10 amps