

- Uses active microwave presence detection technology
- Ceiling mounted 360° microwave detector
- Recessed or surface mounting
- Switches up to 6A of lighting
- Controls up to 25 DALI ballasts
- Sensitive to respond to very small movements
- Dual circuit control
 - switched output
 - separate DALI broadcast output for photocell control
- Wide angled lens detects movement up to 10m in diameter at 2.6m mounting height
- Measures daylight penetration and dims luminaires accordingly
- Maximum recommended mounting height 3m
- Wall switch override connections for push to make switch to manually control luminaires

Order Codes

DALI microwave detector

Recessed Mounting

Surface Mounting



COMRGY

COMRGYSM



Surface Mounting


Detection Range

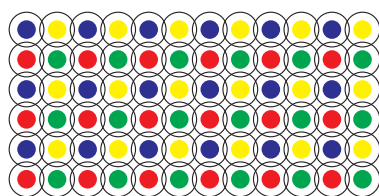

For reliable operation it is essential that units of the same colour code do not occupy adjacent positions in open-plan areas. This is why Whitecroft supplies four variants of the COMRG Detector (Blue/Yellow/Red/Green). Orders are dispatched with a suitable colour code mix.

Dimensions


Recessed



Ø	H	CAØ
100	57	89°

* for metal pan or integration into luminaire cut aperture is 92mm

Surface



Ø	H
100	72

Accessories (See Page 309)



Advance Programmer COMAP



Handheld Controller COMHHC and COMSSC