

warehouse/aisle microwave detector/photocell

> weblink > **COMRL**

- Surface mounted directional microwave detector with programmable features
 - Range sensitivity 5m – 30m
 - Time delay 10 sec – 99 minutes
 - Maintained lighting level
- Switches up to 10A of lighting
- Measures daylight penetration and holds off or dims luminaires if adequate daylight is present
- Adjustable stirrup bracket for wall or ceiling mounting
- Maximum recommended mounting height 12m




ORDER CODES

Warehouse / aisle microwave detector


Surface Mounting
Hand Held Controller

COMRL
COMRLHHP

DIMENSIONS



DETECTION RANGE

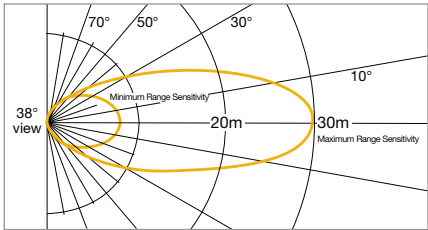

Fully adjustable range sensitivity

Detector	Mounting type	Detector type	Detector range	Max ceiling height	Control method	Detection method	Occupancy type	Off delay	Daylight hold off	Daylight regulating	Programmable	Maximum load
Warehouse/Aisle Microwave Detector COMRL	Surface	Directional	5m – 30m	12m	Switching/DSI / DALI	Microwave	Presence Absence	10 sec-99 min	Yes	Yes	Manual	10 amps 20 ballasts