

concert GL090

IP68 LED medium beam recessed luminaire

> weblink > **CG90**

Optics

- 3 x 3W LED Neutral White, Blue or RGB colour change. All require separate driver
- LED Beam angle: 50°
- Walk over clear 5mm toughened glass cover

Body

- IP68. 'Anti-Siphon' system prevents siphon ingress via cable entry
- Marine grade stainless steel (316) body
- Suitable for in ground, wall or ceiling mounting
- For in ground application, use 1st fix installation tube
- IP66 junction box available for connection between luminaire and driver



ORDER CODES


Concert GL090

3 x 3W Neutral White		CNGL090FNW
3 x 3W Blue		CNGL090FBL
3 x 3W RGB Colour Change		CNGL090FRGB
Installation Tube	(In ground application)	CNTUBE/68
Driver for White/Blue*	Drives up to 3 blue/white luminaires	CNPLU/7003-9
Dimmable Driver for white/blue	Drives up to 2 blue/white luminaires	CNPLD/1-16
Driver for RGB*†	Drives up to 2 RGB luminaires	CNRGBOX
Junction box 4 way IP66	(For white/blue only)	CNJB2
IP66 Junction box	For RGB only	CNJB3

*See page 47 for details of RGB controls

†See page 48 for driver connection schematic

DIMENSIONS

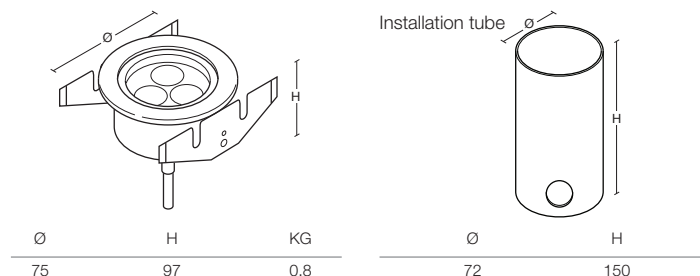

PHOTOMETRIC PERFORMANCE

Due to the continual development in LED technology, please contact our technical department for up to date photometric data

TO SPECIFY

IP68 recessed LED floodlight with marine grade (316) stainless steel body and clear toughened glass cover – as Whitecroft Lighting CONCERT GL090