

concert GL090

IP68 LED medium beam recessed luminaire



Optics

- 3 x 3W LED Neutral White, Blue or RGB colour change. All require separate driver
- LED Beam angle: 50°
- Walk over clear 5mm toughened glass cover

Body

- IP68. 'Anti-Siphon' system prevents siphon ingress via cable entry
- Marine grade stainless steel (316) body
- Suitable for in ground, wall or ceiling mounting
- For in ground application, use 1st fix installation tube
- IP66 junction box available for connection between luminaire and driver



Order Codes

Concert GL090

3 x 3W Neutral White

CNGL090FNW

3 x 3W Blue

CNGL090FBL

3 x 3W RGB Colour Change

CNGL090FRGB

Installation Tube

(In ground application)

CNTUBE/68

Driver for White/Blue* Drives up to 3 blue/white luminaires

CNPLU/7003-9

Dimmable Driver for white/blue

Drives up to 2 blue/white luminaires

CNPLD/1-16

Driver for RGB*

Drives up to 2 RGB luminaires

CNRGBOX

Junction box 4 way IP66

(For white/blue only)

CNJB2


IP66 Junction box

For RGB only

CNJB3

*See page 74 for details of RGB controls

Dimensions

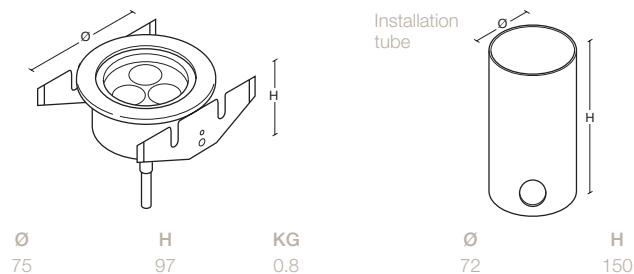

Photometric Performance

Due to the continual development in LED technology, please contact our Technical Desk for up to date photometric data

To Specify

IP68 recessed LED floodlight with marine grade (316) stainless steel body and clear toughened glass cover – as Whitecroft Lighting CONCERT GL090