




LAMP LIFE AND WEIGHT

	HOURS LIFE	WEIGHT KG	REMOTE GEAR BOX BOX WEIGHT KG IP20
1 x 35W CDM-T	9000	1.2	3.0
1 x 70W CDM-T	9000	1.2	3.0
1 x 150W CDM-T	9000	1.2	6.0

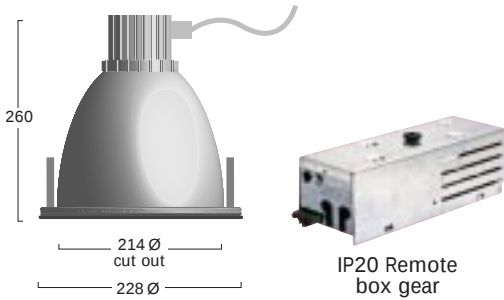

Spectre 200 IP20

ORDER CODES

IP20 HIGH OUTPUT CDM-T DOWNLIGHTERS

LUMINAIRE	SUPPLIED LESS LAMP
SP22CDMIP20W	1 x 35/70/150W CDM-T
SP22CDMIP20WFG	1 x 35/70/150W CDM-T with frosted floating feature glass


GEAR BOXES Order separately	FOR LAMP
SPGB35IP20	35W CDM-T
SPGB70IP20	70W CDM-T
SPGB150IP20	150W CDM-T

To specify state:
Recessed 35/70/150W CDM-T downlight with cast aluminium fixing bezel, white plastic twist lock cover bezel. Anodised aluminium reflector delivering 71% DLOR. Safety glass front/frosted floating feature glass. Recess depth <260mm and bezel Ø <228mm. Remote gear box with plug and socket connection – as Whitecroft Lighting SPECTRE 200 IP20.

Spectre 200
1 x 150W CDM-T Lamp



- SHR MAX = 0.936
- DLOR = 0.71



UTILISATION FACTORS UF(F)		SHR NOM 0.75									
Room Reflectance Room Index		C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00
0.70	0.50	0.20	0.55	0.61	0.65	0.67	0.71	0.73	0.74	0.76	0.77
0.50	0.30	0.20	0.51	0.57	0.60	0.63	0.66	0.68	0.70	0.72	0.73
0.00	0.00	0.00	0.47	0.53	0.56	0.58	0.61	0.63	0.64	0.66	0.67