



Info

- Slimline channel of LEDs to illuminate in coves and underneath cabinets
- ‘Warm’ white 2700K colour temperature
- UV resistant opal white polycarbonate diffuser
- Extruded aluminium body complete with fixing brackets
- Driver and starter lead supplied separately from LED strip

Order Codes


Coveline	Fixed Output
135mm, 108lm (2W)	CL127K
260mm, 238lm (4W)	CL227K
505mm, 477lm (8W)	CL327K
1000mm, 939lm (16W)	CL427K
1495mm, 1467lm (24W)	CL527K

Drivers

Fixed output, 20W	CNSLD20
Fixed output, 75W	CNSLD75

Lead


3m starter lead (for connection from driver to starting strip)	CLST3M
--	--------

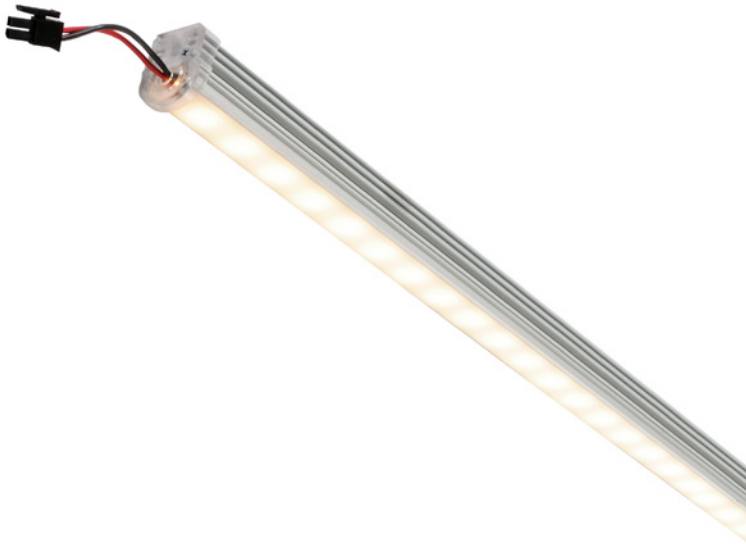

LED Performance

Colour Temp	Ra (CRI)	Life Expectancy	Colour Consistency
2700K	Ra>80	L ₇₀ (50,000hrs)	MacAdam 3 SDCM

Dimensions



Version	L	W	H	KG
108lm	135	20.4	20.2	0.4
238lm	260	20.4	20.2	0.8
477lm	505	20.4	20.2	1.2
939lm	1000	20.4	20.2	2.4
1467lm	1495	20.4	20.2	3.6

To Specify

IP40 linear LED strip luminaire with extruded aluminium body complete with pre-wired cables and connectors – as Whitecroft Lighting COVELINE