

Cygnus SX

Post top lantern for outdoor applications

Whitecroft
lighting

IK08

IP65

LED



Optics

- Light output options:
 - 4004 lumens (4000K - 53W)
 - Available with 3000K LED
- Symmetrical distribution
- Zero light pollution
- UV stabilised polycarbonate clear diffuser

Body

- Die cast aluminium
- Coated for corrosion and saline environment resistance
- For outdoor applications within 3km of the coast, an enhanced paint finish can be offered on request
- IP66 IK08 rated protection
- 60mm diameter post top spigot
- Finished in Graphite Grey or Silver/grey
- RAL Colour: Grey RAL7024. Silver/grey RAL9007
- Supplied with IP67 rated 3 pole plug and socket
- Fixed output as standard, DALI optional
- Suitable for ambient temperatures between -20°C to +40°C

Order codes

Cygnus SX Graphite Grey		LL/CW	L70
LED 4004 lumen, 53W	CYX14KG	76	60k


Options

Silver/grey	Replace G with S	i.e CYX14KS
3000K	Replace 4K with 3K	i.e. CYX13KG
DALI driver	Add 'Y' after 'CYX'	i.e. CYXY14KG

LED Performance


Colour Temp	RA (CRI)	Colour consistency
4000K	>80	MacAdam 4 SDCM

Dimensions

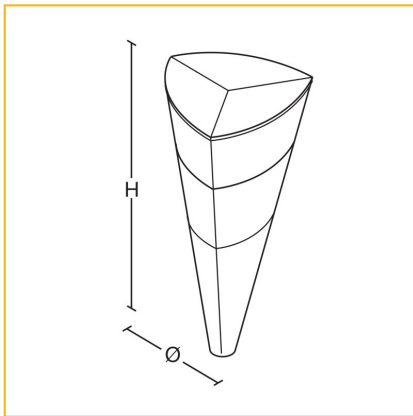

H	KG	Ø	Windage (m2)
765	7.7	375	0.17

Photometric Performance



4000K 53W 4004
Lumen
LOR = 100.0%

To Specify

IP66 LED post top lantern with tapered die cast aluminium body. With symmetrical distribution having zero upward light – as
Whitecroft Lighting CYGNUS SX.
