



Optics

- Lamp options:
 - 1 x 28W 2D T5
- Opal or clear prismatic polycarbonate diffuser

Body

- IP65
- Square or circular polycarbonate body finished white
- This product is suitable for exterior use under canopies or wall mounted on a single story building only. It is not suitable for use on roof tops or areas exposed to direct sunlight or adverse weather conditions.




Order Codes

Opal – Round 2D T5 1 x 28W	HF Gear DKROH28W	3 hr Emergency DKROH28WEMIN
Prismatic – Round 2D T5 1 x 28W	HF Gear DKRPH28W	3 hr Emergency DKRPH28WEMIN
Options SQUARE	Replace R with S	i.e. DKSOH128W




Square Opal

Photometric Performance




1 x 28W 2D T5
Round Prismatic
• LOR = 67%



1 x 28W 2D T5
Square Opal
• LOR = 56.6%

Dimensions

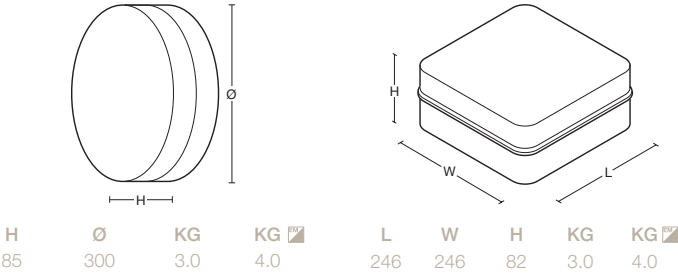

Lamp Performance

Wattage	IL@25°C	Lamp Life
1 x 28W 2D T5	2150	21,000hrs

To Specify

Surface mounted IP65 bulkhead for 28W 2D T5 lamp. Square or Round polycarbonate body and diffuser options opal or clear prismatic. Gear options high frequency with mains or 3 hour maintained integral emergency. Diffuser to be fixed to gasketed body with stainless steel fixing screws – as Whitecroft Lighting DUSK