

egress maxi

Emergency: Indoor low profile emergency bulkhead



APPLICATION

This product will appeal in applications seeking to combine high functionality including an outstanding light distribution with a pleasing aesthetic

- Wall or ceiling mounting
- Exit routes
- Corridors
- Stairwells

SPECIFICATION


- Supplied with 8W T5 lamp
- Wall or ceiling mounted
- A slim brushed aluminium modular base facilitates mounting and pre-wiring, prior to the screw fixing of the main white polycarbonate body and clear linear prism diffuser
- Optic consists of a curved polycarbonate diffuser and contoured reflector to give an exceptional and broad light distribution
- High quality clip on screen printed legend panels with aluminium frame – please specify separately see page 190
- Viewing distance up to 25m when using legend panel
- IP20
- Slim profile
- 3 hour maintained or non-maintained versions
- High temperature Ni-Cd battery with constant current charger and LED charge indicator
- Cable entry locations on the side, rear and base
- Ambient 0 - 25°C
- Designed and manufactured to meet the requirements of BS EN60598.2.22

Options

-  Easytest – integral self test version available see page 181



DIMENSIONS

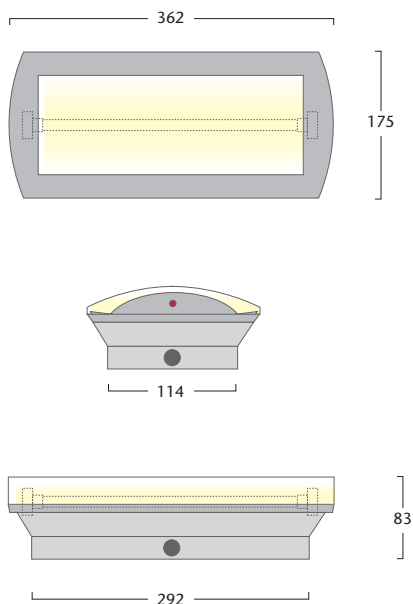

FEATURES

	EMXNMF8	EMXMF8
MODE	Non-maintained	Maintained
DURATION	3 hours	
INPUT VOLTAGE	230/240V – 50Hz	
CIRCUIT WATTS	8W	20W
BATTERY TYPE	High temperature Ni-Cd battery	
RECHARGE TIME	24 hours	

ORDER CODES – EGRESS MAXI

INDOOR LOW PROFILE EMERGENCY LIGHTING BULKHEAD

LAMP SUPPLIED	EMERGENCY LIGHTING	
1 x 8W T5	3 hour non-maintained	EMXNMF8
1 x 8W T5	3 hour maintained	EMXMF8

EASYTEST OPTION Add suffix to order codes above

/ET  Integral self auto-test, i.e. EMXNMF8/**ET**

ALUMINIUM FRAMED CLIP ON SCREEN PRINTED LEGEND PANEL Order separately

See page 190 to specify

To specify state:


8W T5 IP20 wall or ceiling mounted emergency exit sign, brushed aluminium modular base to facilitate mounting and pre-wiring, screw fixed main White polycarbonate body, clear curved linear prism diffuser with contoured reflector and clip in screen printed legend panels with aluminium frame. 3 hour maintained/non-maintained, high temperature Ni – Cd battery with constant current charger and LED charge indicator – as Whitecroft Lighting EGRESS MAXI

QuickLink

EGMM

Go

SPACING DATA TABLE

Ceiling mounting height (metres)	Lighting level (lux)	Escape route (min 0.2 lux) permanently unobstructed	Escape route (min 1.0 lux) normal risk	Anti Panic (min 0.5 lux) open area
				
2.5	2.5	6.8 16.9 7.6 3.1	2.9 9.2 4.3 1.3	3.6 10.0 6.1 1.7
4	0.9	7.3 20.0 9.1 3.4	– 7.2 3.0 –	3.6 12.5 6.8 1.8
6	0.4	6.0 20.3 9.5 2.7	– – – –	– – – –