



enterprise

Exterior: IP55 Circular surface luminaire



PHOTOMETRY

Enterprise
SURFACE CIRCULAR LUMINAIRE – PRISMATIC
2 x 55W TC-L



- LOR = 54.6%
- SHR MAX = 1.82

UTILISATION FACTORS UF(F) SHR NOM=1.75

Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	N/A	0.35	0.39	0.41	0.45	0.48	0.50	0.52	0.55
0.50	0.30	0.20	N/A	0.29	0.33	0.36	0.40	0.43	0.45	0.48	0.50
0.00	0.00	0.00	N/A	0.24	0.27	0.30	0.34	0.36	0.38	0.41	0.43

LAMP PERFORMANCE MATRIX

WATTAGE	IL@25°C	LAMP LIFE
1 x 55W TC-L	4800	10,000

APPLICATION

- Covered car parks
- Amenity areas
- Covered walkways


SPECIFICATION

- Lamp options: 2x55w TC-L
- Spun aluminium body finished in White
- Clear prismatic polycarbonate diffuser fixed to body via tamper proof fixing screw and spun aluminium clamp plate
- EPDM gasket seal between body and diffuser
- IP55 ingress protection
- High frequency control gear as standard

Options

-  Easytest – integral self test version available

DIMENSIONS

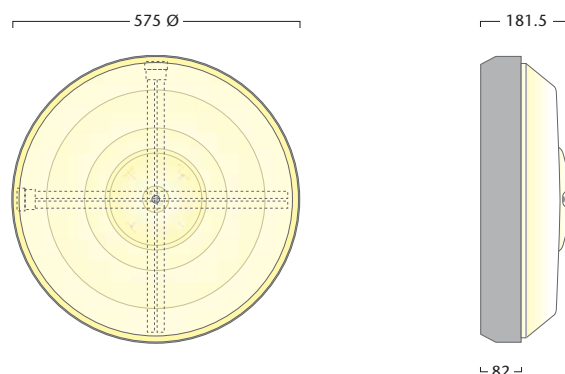

ORDER CODES – ENTERPRISE

IP55 CIRCULAR SURFACE LUMINAIRE

SUPPLIED LESS LAMPS

2 x 55W TC-L

LUMINAIRE

ENH255

EMERGENCY Add suffix to order code above

EMIN 3 hour maintained integral emergency, i.e. ENH255**EMIN**

EASYTEST OPTION Add suffix to luminaire order code above

/ET  Integral self autotest, i.e. EN2H255/**ET**

To specify state:

2x55w TC-L circular surface luminaire with clear prismatic polycarbonate diffuser lens and high frequency control gear. Diffuser positively fixed via central tamper proof fixing and spun aluminium clamping ring. IP55 – as Whitecroft Lighting ENTERPRISE.

QuickLink

ENT

Go

Whitecroft Lighting Ltd
Burlington Street, Ashton-under-Lyne
Lancashire OL7 0AX United Kingdom
Tel: +44 (0)870 5 087 087 Fax: +44 (0)870 5 084 210
email@whitecroftright.com www.whitecroftright.com



Lighting for Life