



Whitecroft Lighting Ltd

Burlington Street
Ashton-under-Lyne
Lancashire OL7 0AX
United Kingdom

Telephone: +44 (0)870 5 087 087

Facsimile: +44 (0)870 5 084 210
email@whitecroftlight.com
www.whitecroftlighting.com

Moorlite · Hitech · Simplex



Esprit
Compact Fluorescent Downlighters

Esprit

MOTIVATION

A quality, one piece high frequency circular compact luminaire using the latest manufacturing methods in order to combine easy installation, high efficiency and compact dimensions with good value for money.

APPLICATION

As IP20


- Retail
- Receptions
- Corridors and stairwells
- Offices
- Hotels
- Pubs and Clubs

With clip in attachment giving IP44 from below


- Toilets
- Shower areas
- Kitchens
- Factories
- Work Shops

SPECIFICATION


- 3 Body sizes, 13W - 150mm aperture/80mm deep, 18 and 26W - 200/114mm, 32 and 42W - 250/150mm.
- One piece assembly with precision moulded bezel and gear housing.
- Horizontally mounted, 3000°K colour temperature lamps included.
- High frequency or high frequency dimming gear
- Anodised aluminium reflectors, (except 13W - vacuum metalised).
- IP20, or IP44 from below if IP44, TP(a) attachment is used.
- 13W luminaire is supplied complete with IP44, TP(a) attachment which can be removed if not required (press gently and twist)
- On other sizes the attachment options listed are supplied as separate items easily fixed to the luminaire
- 3 hour maintained emergency option
- User friendly rapid fix push down straps, 3 point location.

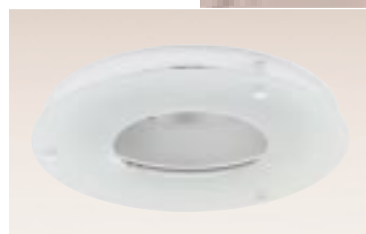

Polo feature glass

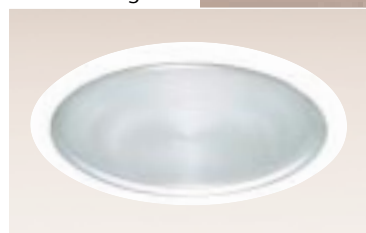

IP44 cover

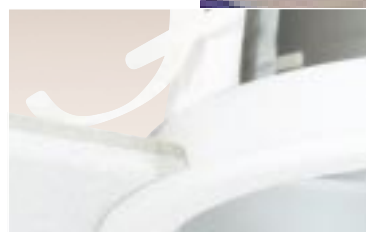

Ceiling retention system




Standard reflector ES226H






Esprit

1 X 18W TCD

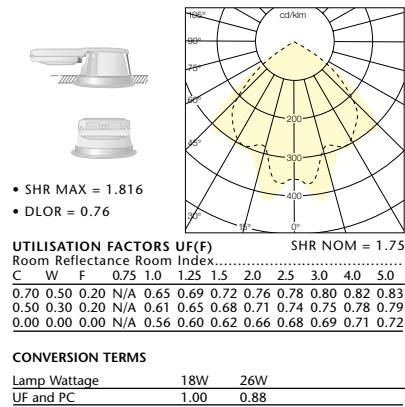


Esprit

2 X 18W TCD

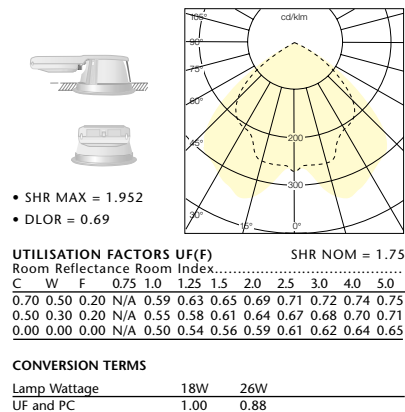


Esprit

2 X 18W TCD IP44 DIFFUSER

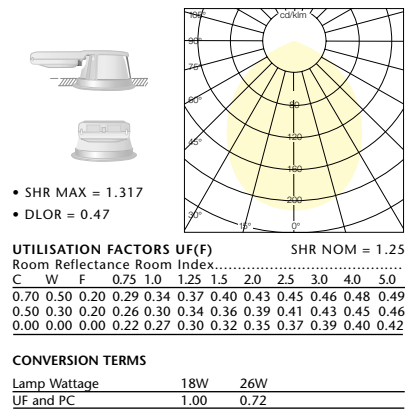


Esprit

1 X 32W TC-T

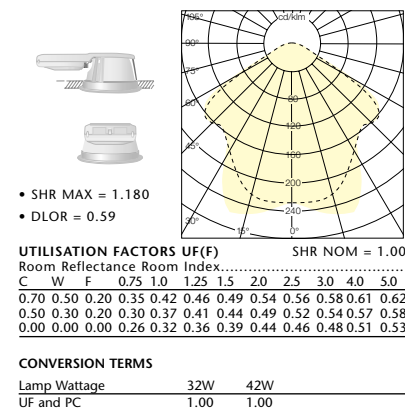

DIMENSIONS

LAMP (SINGLE AND TWIN)	CUT OUT DIAMETER A	DIAMETER OVER FLANGE B	DEPTH C	OVERALL LENGTH D	WEIGHT KG
13W	150	165	80	268	0.33
18 and 26W	200	218	114	363	0.90
32 and 42W	250	275	150	445	1.80

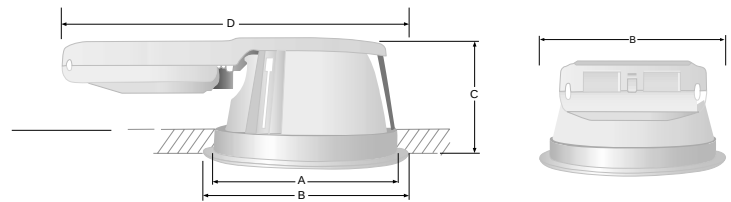

Esprit

ORDER CODES

COMPACT FLUORESCENT DOWNLIGHTERS

HIGH FREQUENCY GEAR	HIGH FREQUENCY DIMMING	LAMP SUPPLIED
ES113H		1 x 13W TC-D
ES118H		1 x 18W TC-D
ES218H	ES218R	2 x 18W TC-D
ES126H		1 x 26W TC-D
ES226H	ES226R	2 x 26W TC-D
ES132H		1 x 32W TC-T
ES232H	ES232R	2 x 32W TC-T
ES142H		1 x 42W TC-T
ES242H	ES242R	2 x 42W TC-T

ATTACHMENTS

ESFG-2	Polo Feature glass attachment – 18/26W
ESFG-3	Polo Feature glass attachment – 32/42W
ESIP44-2	IP44 TP(a) attachment – 18/26W
ESIP44-3	IP44 TP(a) attachment – 32/42W
ESTL-3	Decorative turbo louvre – 32/42W

EMERGENCY - Add suffix to order codes above

E3 – Fully remote, available on all luminaires

To specify state.

One piece construction compact fluorescent luminaire, with precision moulded high frequency or HF dimming gear housing, body and bezel. 13W < 81mm deep and 151mm cut aperture, 18 and 26W < 115mm deep and 201mm cut aperture, 32 and 42W < 151mm deep and 251mm cut aperture. 3 point rapid fix pull down straps - as Whitecroft Lighting ESPRIT