

euroflood maxi

Exterior: IP55 High wattage projector floodlight



APPLICATION


- Sports areas
- Golf driving ranges
- Architectural structures
- Freight terminals
- Railway sidings
- Industrial parks
- Docks

SPECIFICATION


- Lamps:
 - 1000W HQI-T
 - 2000W HQI-T
- 1000W – 240V, 2000W – 415V
- Class 1 protection
- IP55 lamp and reflector assembly
- Variable lamp focus
- Adjustable aiming device
- Black polyester coated die cast aluminium body and cover
- Polished anodised aluminium reflector
- Galvanised steel mounting stirrup
- Toughened glass lense
- Remote IP65 gearbox maximum distance from luminaire 20 metres
- Suitable for an ambient between -25°C and +40°C
- Timed ignitor
- Supplied with lamp

DIMENSIONS

Euroflood Maxi 1000W

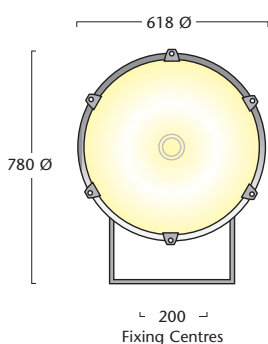


Euroflood Maxi 2000W

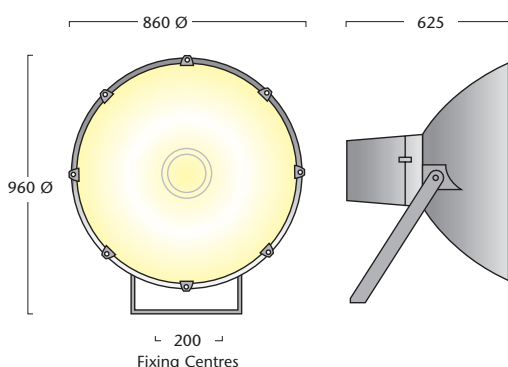



PHOTOMETRY

1 x 1KW HQI-T Lamp

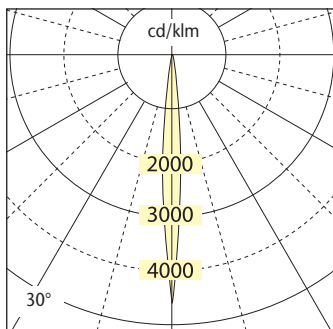

• LOR = 62%



Remote Gear Box

LAMP PERFORMANCE MATRIX

WATTAGE	IL@25°C	LAMP LIFE
1000W HQI-T (240v)	90,000	12,500
2000W HQI-T (415v)	200,000	6,000

WEIGHT AND WINDAGE

LUMINAIRE	WATTAGE	WEIGHT INC. GEARBOX	WINDAGE
EFX1000HN	1000	17.3Kg	0.31m ²
EFX2000HN	2000	27.5Kg	0.59m ²

ORDER CODES – EUROFLOOD MAXI

IP55 HIGH WATTAGE PROJECTOR FLOODLIGHT

LAMP SUPPLIED	VOLTAGE	LUMINAIRE
1 x 1000W HQI-T	240v	EFX1000HN
1 x 2000W HQI-T	415v	EFX2000HN

To specify state:

Symmetric black polyester powder coated die cast aluminium IP55 narrow beam projector flood with IP65 remote gearbox and toughened glass diffuser and anodised aluminium reflector, supplied with 1000 or 2000W HQI-T lamps. Incorporating variable lamp focus and adjustable aiming device – as Whitecroft Lighting EUROFLOOD MAXI

QuickLink

EURM

Go