

euroflood mini

Exterior: IP65 Asymmetric floodlights

APPLICATION

- Building facades
- Signs
- Sports areas
- Security lighting
- Car parks
- Area floodlighting
- Swimming pools
- Churches
- Sports facilities

SPECIFICATION

- Lamp options:
 - 70W HQI-TS/CDM-TD
 - 150W HQI-TS/CDM-TD
 - 300W Tungsten Halogen
- Class 1 protection
- Asymmetric light distribution for low light pollution
- Precise asymmetric optical control
- IP65 protection
- Body – precision diecast aluminium
- Finished polyester powder coat:
 - Black
 - White
- Reflector: Hammered, high-grade aluminium, brightened and anodised
- Glass: Toughened
- Mounting by cradle supplied
- Attachments:
 - Uplighter bracket (interior applications)
 - Wire guard
- Takes supply cable of 5-10mm diameter
- Supplied less lamp


ADVANTAGES

- No light pollution
- Reduced glare
- Reduced light spill
- Slim design
- Low windage area





DIMENSIONS

Euroflood Mini

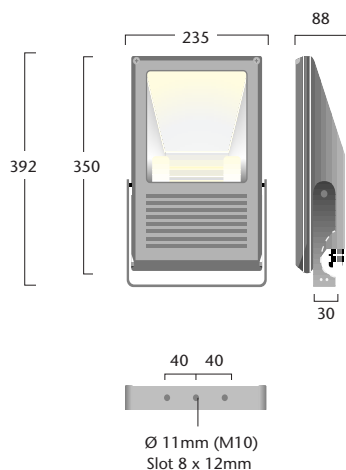

OPERATING POSITIONS




WEIGHT AND WINDAGE

VERSION	WATTAGE	WEIGHT	WINDAGE*
SC70	70W	6.0Kg	0.03m ²
SC150	150W	6.5Kg	0.03m ²

* Figures are given for the typical mounting position i.e. side windage

PHOTOMETRY

1 x 70W CDM-TD Lamp

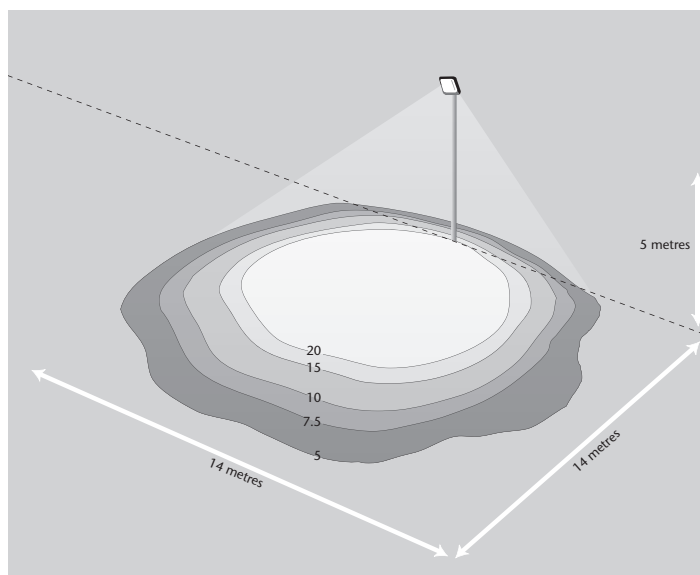

LAMP PERFORMANCE MATRIX

WATTAGE	IL@25°C	LAMP LIFE
70W CDM-TD	6,600	15,000
70W HQI-TS	5,000	15,000
150W CDM-TD	14,000	15,000
150W HQI-TS	11,000	12,500
300W TH	3,100	2,000

ORDER CODES – EUROFLOOD MINI

IP65 ASYMMETRIC FLOODLIGHTING

SUPPLIED LESS LAMP	BEAM	COLOUR	MINI
70W CDM-TD/HQI	Double ended lamp	Black	SC70/B
150W CDM-TD/HQI			SC150/B
300W Tungsten Halogen			SC300/B

ACCESSORIES FOR IP65 ASYMMETRIC FLOODLIGHTING

OPTION	MINI
Wire Guard	SCWCMN
Uplighter Bracket Black	SCUBMN
Uplighter Bracket White	SCUBMN/W

COLOUR OPTIONS (BLACK AS STANDARD) Add suffix to order codes above

W White i.e. SC150/**W**

To specify state:

Die cast aluminium precision floodlight with asymmetric beam. Body <89mm deep 70/150W HQI/CDM-TD/SON-TS lamp. IP65 – as Whitecroft Lighting EUROFLOOD MINI