

euroflood pivot


Exterior: Adjustable IP65 asymmetric projector flood

APPLICATION

- Exterior building facades
- Town squares
- Parks
- Town and city beautification schemes
- Atrium

SPECIFICATION


- Lamps
 - 250W and 400W HQI-T
 - 250W and 400W SON-T
 - All options E40 base
- Adjustable through 180°, with the glass facing horizontally up or down or any position in-between
- Body: die cast aluminium
- Finish
 - Black RAL 9005
 - Silver RAL 9006
- Glass: clear safety glass
- Integral control gear with P.F.C. capacitor
- Timed ignitor
- IP65 ingress protection
- Mounting by cradle supplied
- Class 1 protection
- Supplied less lamp

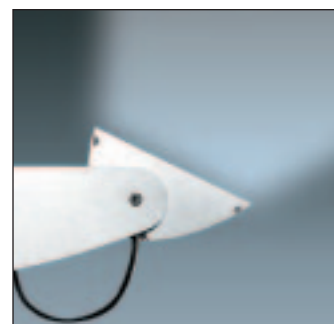

Head adjustable through 180°



DIMENSIONS

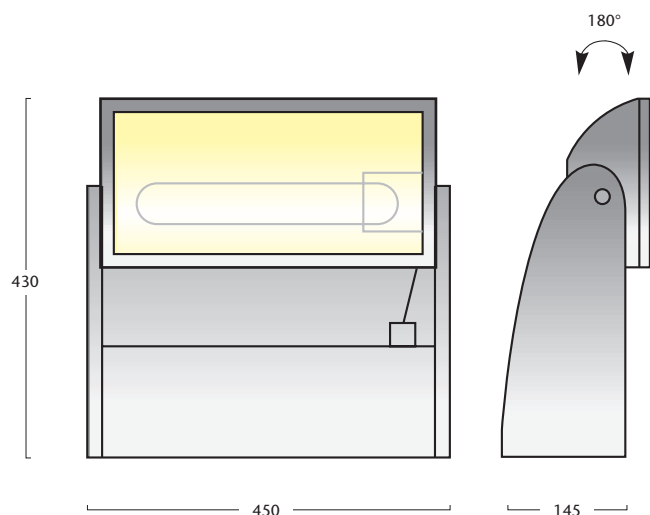


PHOTOMETRY

Euroflood Pivot
WALL MOUNTED
1 x 250W HQI-T Lamp



• LOR = 63.7%



ORDER CODES – EUROFLOOD PIVOT

ADJUSTABLE IP65 ASYMMETRIC HID PROJECTOR

SUPPLIED LESS LAMP	BEZEL COLOUR	LUMINAIRE
250W HQI-T or SON-T, E40 base	Black	EFV250B
400W HQI-T or SON-T, E40 base	Black	EFV400B
250W HQI-T or SON-T, E40 base	Silver	EFV250S
400W HQI-T or SON-T, E40 base	Silver	EFV400S

LAMP PERFORMANCE MATRIX

WATTAGE	IL@25°C	LAMP LIFE
250W HQI-T	20,000	15,000
250W SON-T	27,000	28,500
400W HQI-T	34,000	15,000
400W SON-T	48,000	28,500

To specify state:

Adjustable IP65 asymmetric HQI-T/SON-T projector with Black RAL9005 or Silver RAL9006 cast aluminium body with integral ballast and P.F.C. Luminaire head to pivot through 180° with the safety glass front facing in any position from horizontally downwards to upwards. To incorporate timed ignitor and safety glass – as Whitecroft Lighting EUROFLOOD PIVOT

QuickLink

PIVOT

Go