


SPECIFICATION:

Lamp type:	2000W HQI-TS double ended
Output:	230000 lm 4100°K Ra65
Materials:	
Body:	Die cast Aluminium
Reflector:	Specular Anodised Aluminium
Diffuser:	Tempered Glass
Control gear:	Remote Magnetic
Supply:	400/415v 3~ 50Hz AC
Supply flex max:	6mm ² , 2ph + $\perp$ overall Ø9-12mm
Terminal block type:	Screw terminals
Ingress protection:	IP66/IK08Ø9-12mm
Min dist. to illuminated object:	10m.
Weight:	18.5Kg
Max. Windage:	0.23m ²
Max wire length gear to lamp:	50m depending on wire size.

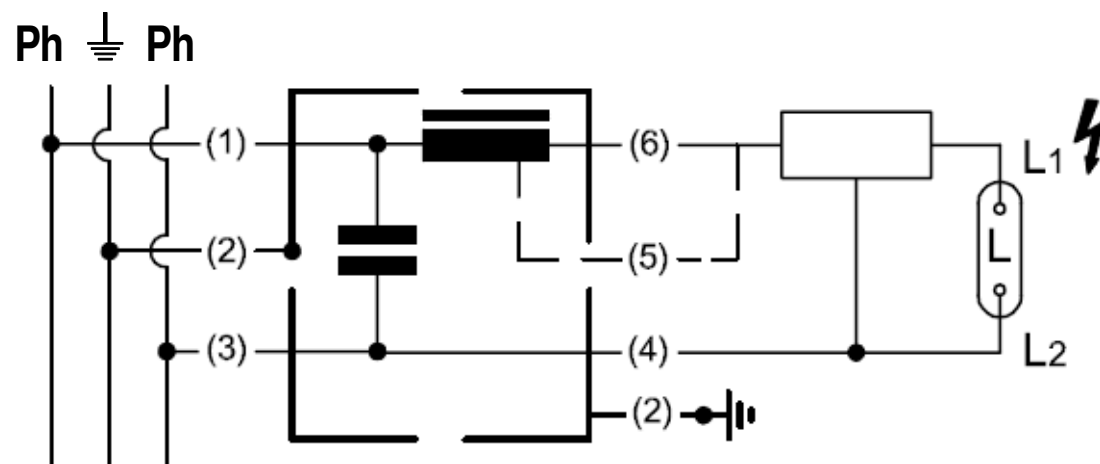

GENERAL INFORMATION

1. A qualified electrician, in accordance with IEE wiring regulations should carry out connection to mains wiring.
2. This unit must be EARTHED.
3. Ensure that the rated voltage and frequency requirements are compatible with the available mains supply.
4. Cleaning of reflectors and lenses should be carried out using clean, soft and lint free cloths and anti-static cleaning fluid.
5. Do not carry out high voltage insulation test, i.e. 500/1000v this may damage internal components.

FURTHER INFORMATION

TECHNICAL SUPPORT
Telephone: 0161 331 5700
E-mail: technical@whitecroftlight.com
<http://www.whitecroftlighting.com/>

Whitecroft
lighting



Installation sheet
Euroflood Sport 2kW



PK/EFS2KWINST







Whitecroft Lighting Limited

Burlington Street, Ashton-under-Lyne, Lancashire OL7 0AX
Telephone +44 (0)870 5 087 087 Facsimile: +44 (0)870 5 084 210
Registered No. 3848973 England Registered Office: As above

Revision: 0 - June '15

Euroflood Sport

Whitecroft Lighting Limited

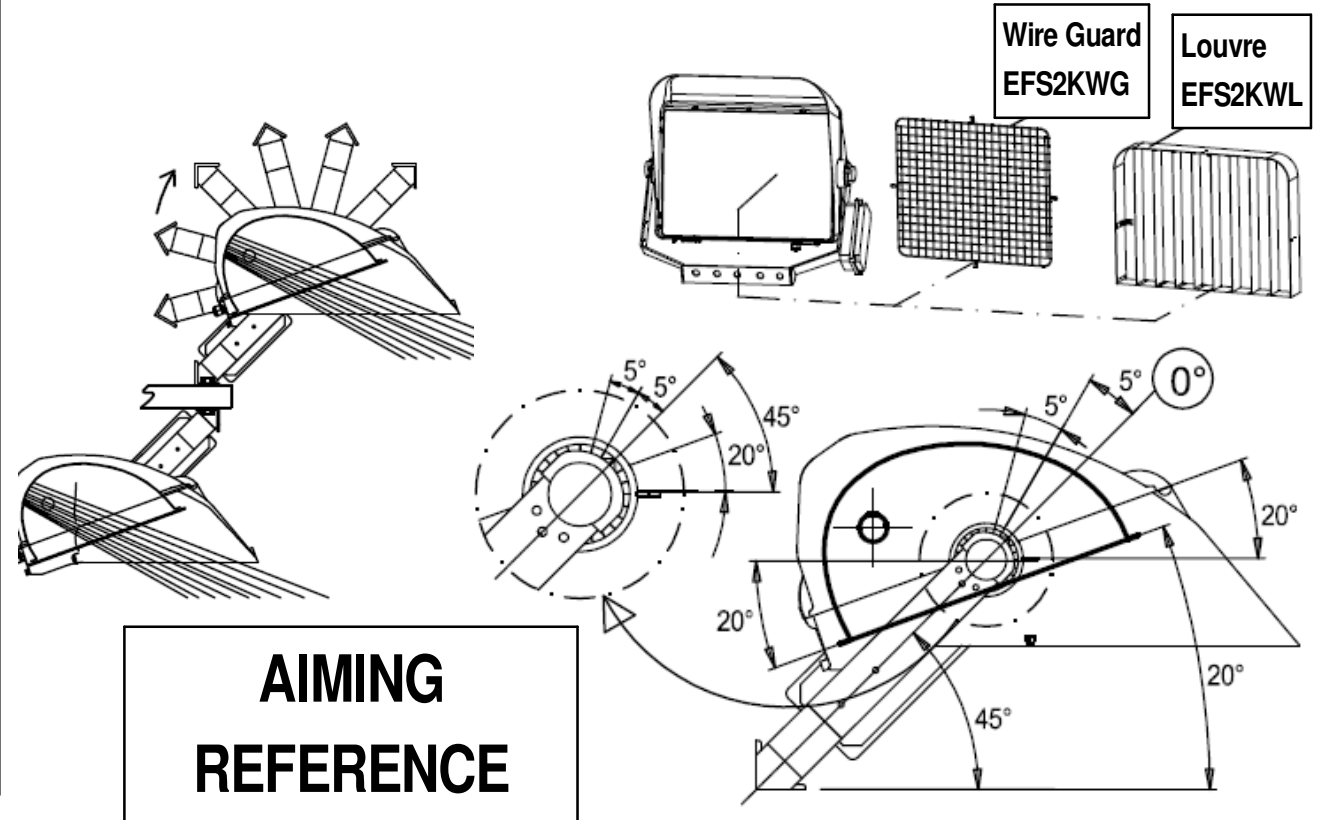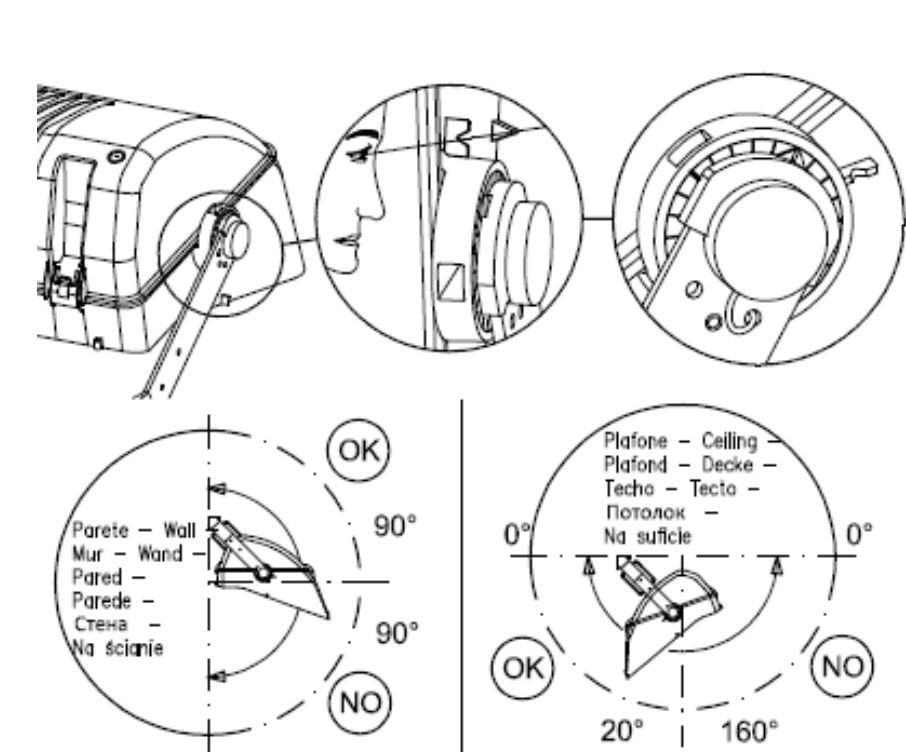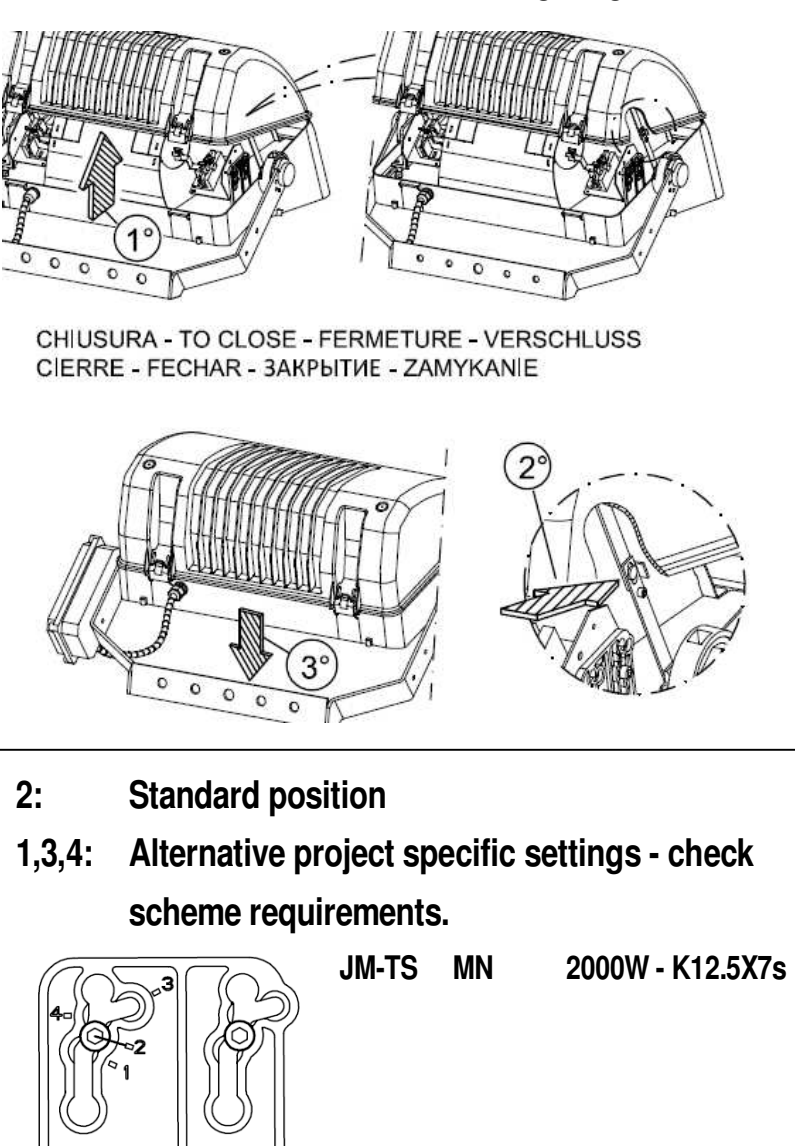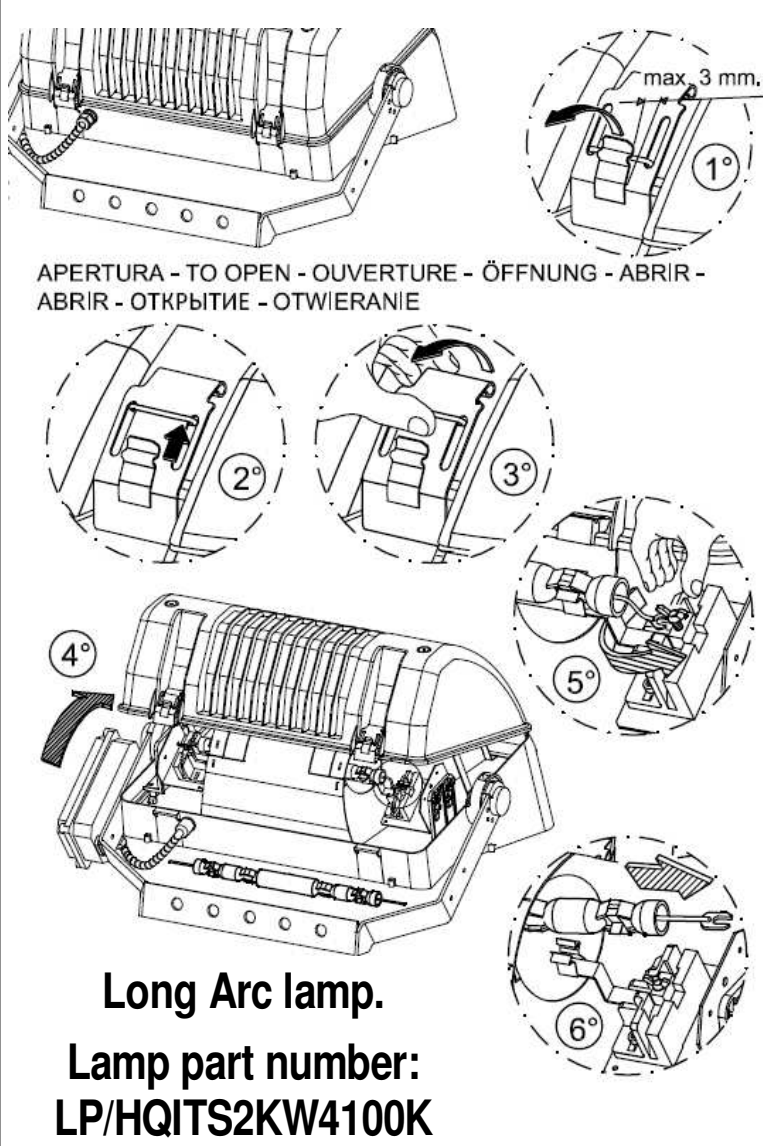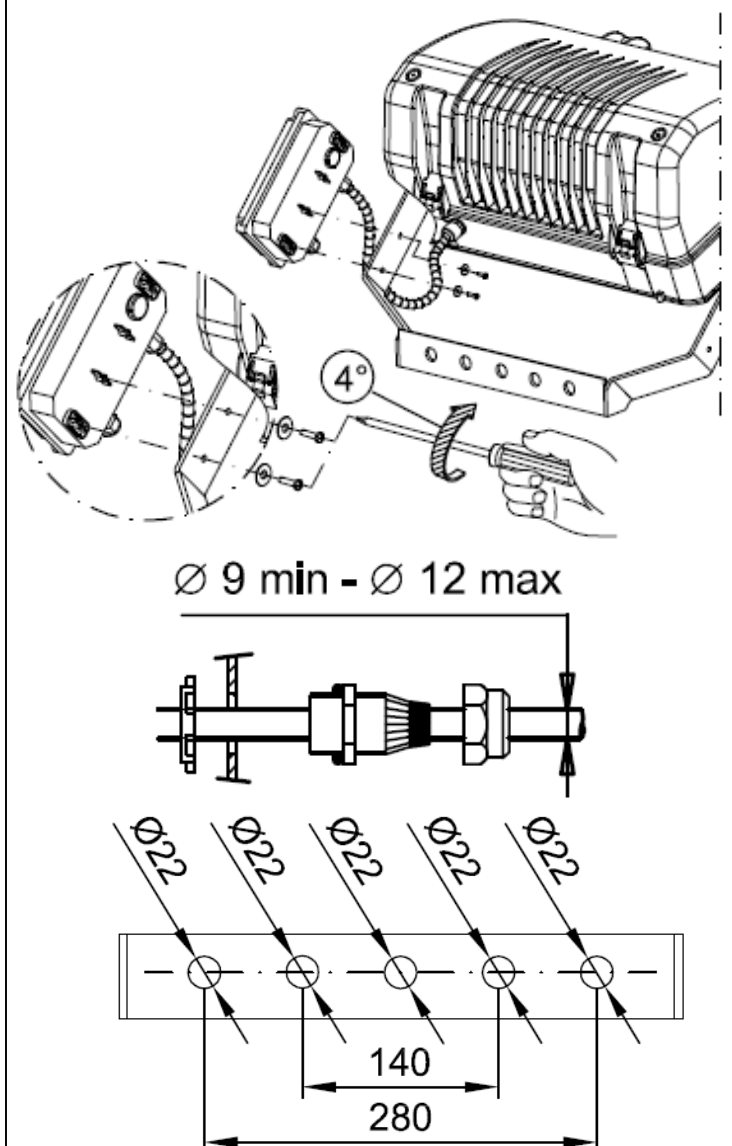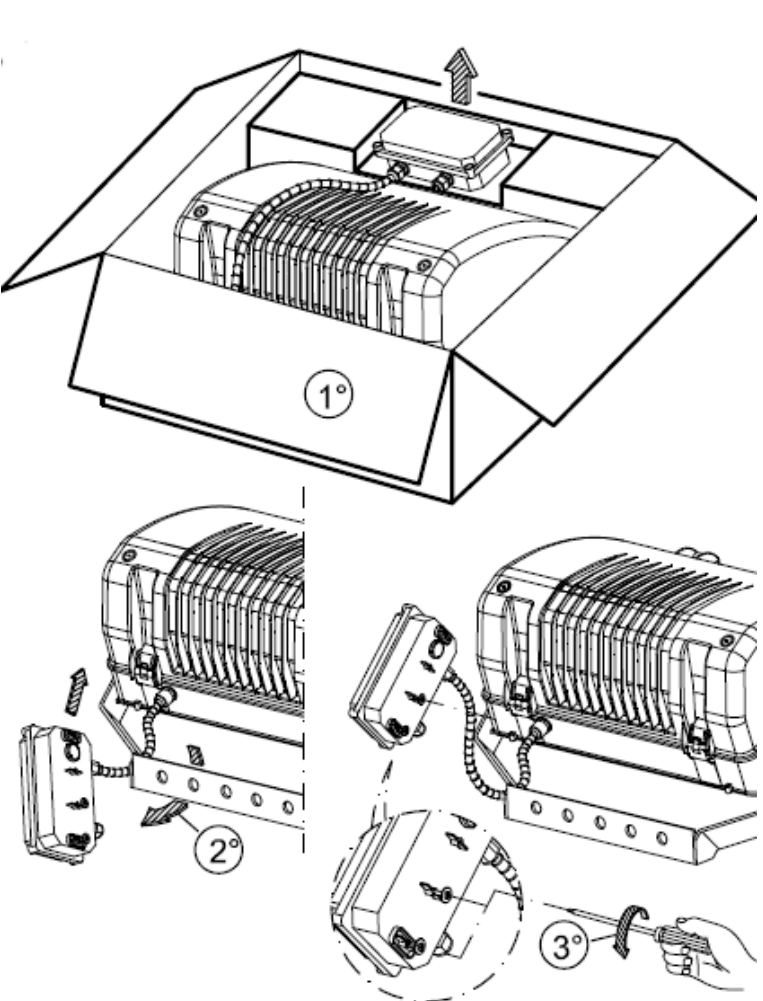

NB: For aiming angles of 130-170° special ceramic glass is required.
Contact Whitecroft Lighting for details.

