

Whitecroft
lighting



Additions 6

Fin and Infinity

Wall and pole mounted asymmetric HID projectors

Fin

MOTIVATION


Fin – A wall or pole - mounted projector with neutral but memorable contours designed to compliment but not compete with the architectural features on the walls, facades and ceilings it is designed to enhance. Its classic lines and IP65 ingress protection also make it ideal for exterior use.

APPLICATION


- Retail
- Airport facilities
- Approach roads and pathways
- Building facades
- Museums
- Town squares
- Reception areas
- Feature staircases

SPECIFICATION

- Lamps:
 - 70 and 150W CDM-TD
 - 150, 200, 250, and 300W tungsten halogen 114.2mm double ended all options R7 base
- Body: die cast aluminium
- Finish
 - Black RAL 9005
 - Silver RAL 9006
 - White RAL 9010
- Glass: clear glass
- Integral control gear with P.F.C. capacitor
- Steel wall plate
- IP65 Ingress Protection
- Supplied less lamp

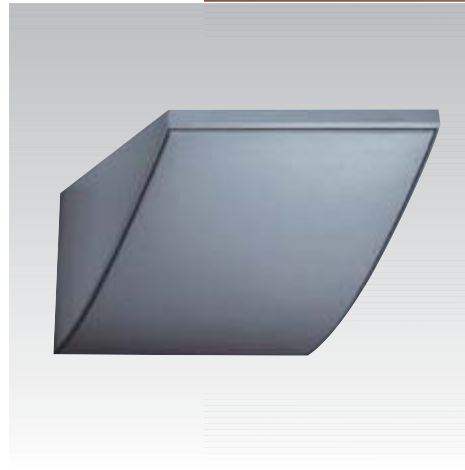



FIN70WS

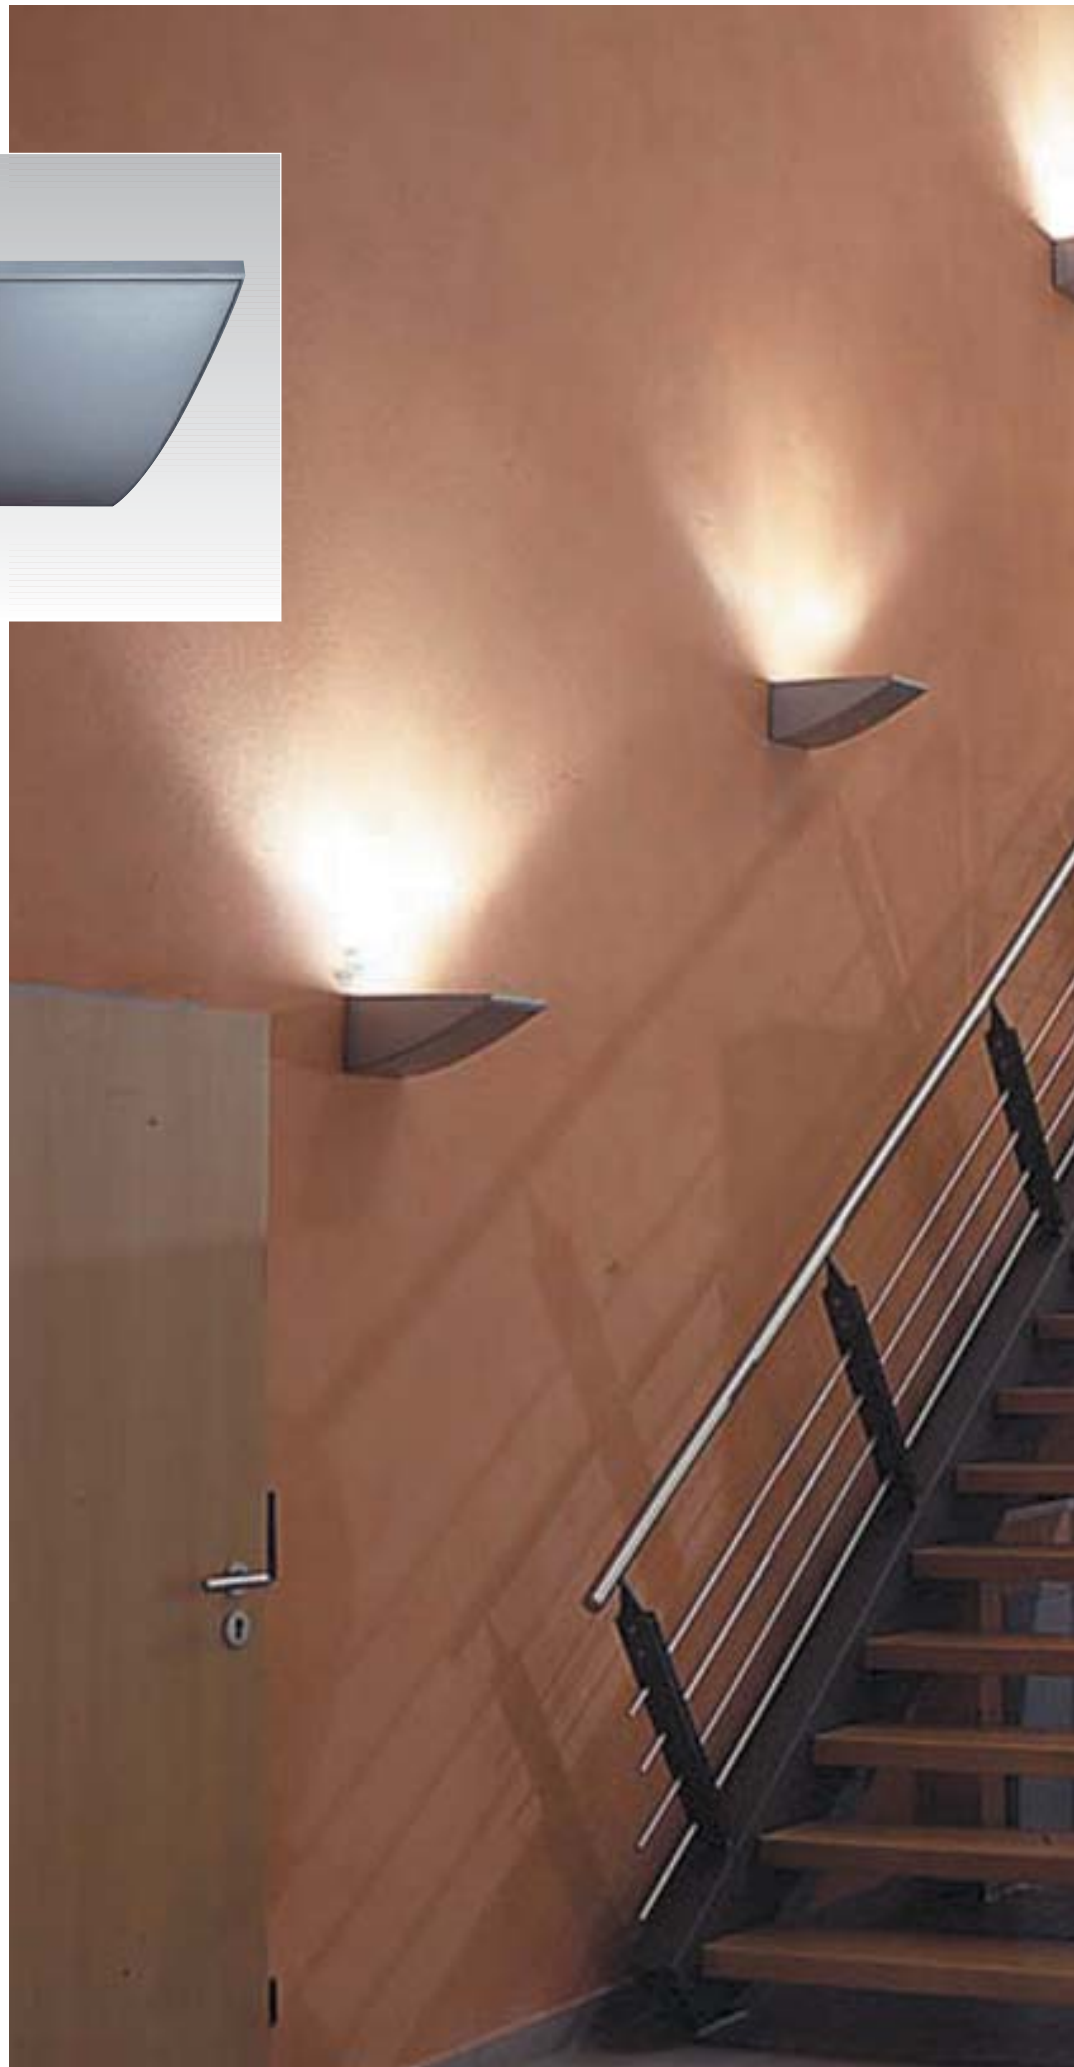





Fin

1 x 300W TH

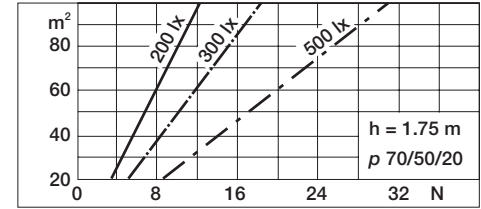



Fin

1 x 70W CDM-TD

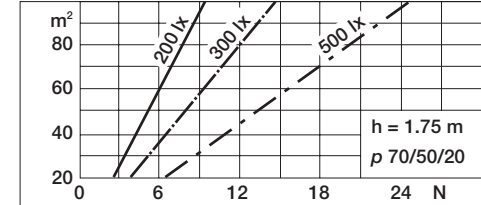


Fin

1 x 150W CDM-TD

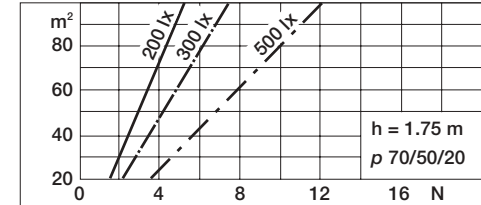

DIMENSIONS



Fin

ORDER CODES

WALL MOUNTED IP65 ASYMMETRIC HID PROJECTORS

LUMINAIRE	BEZEL COLOUR	LAMP(S) REQUIRED
FIN70WB	Black	70W CDM-TD, R7 base
FIN150WB	Black	150W CDM-TD, R7 base
FIN70WW	White	70W CDM-TD, R7 base
FIN150WW	White	150W CDM-TD, R7 base
FIN70WS	Silver	70W CDM-TD, R7 base
FIN150WS	Silver	150W CDM-TD, R7base
FINB	Black	150/200/250 or 300* Halogen DE, R7 base
FINW	White	150/200/250 or 300* Halogen DE, R7 base
FINS	Silver	150/200/250 or 300* Halogen DE, R7 base

NOTE: Lamp length – 114.2mm

To specify state:

IP65 asymmetric CDM-TD/Halogen projectors with die cast aluminium body, clear glass cover and IP65 ingress protection. Integral ballast with power factor correction. Body 135mm deep, 210mm wide projecting 315mm in black RAL9005, silver RAL9006, or white RAL 9010 - As Whitecroft Lighting FIN wall mounted.

Infinity

MOTIVATION

Infinity - This adjustable asymmetric projector provides a discrete but flexible capability to illuminate large areas of ceiling, facades and general open spaces from wall, floor and pedestal mounting positions. Its soft floodlighting distribution makes it ideal for both direct and indirect use, whilst its stylish design and IP65 rating lends it to numerous interior and exterior architectural situations.

APPLICATION

- Retail
- Airport facilities
- Museums
- Interior facades
- Reception areas
- Feature staircases

SPECIFICATION



- Lamps:
 - 250W & 400W HQI-T
 - 250W & 400W SON-T
 - All options E40 base
- Adjustable through 180°, with the glass facing horizontally up or down or any position in between
- Body: die cast aluminium
- Finish
 - Black RAL 9005
 - Silver RAL 9006
- Glass: clear safety glass
- Integral control gear with P.F.C. capacitor
- Timed ignitor
- IP65 Ingress Protection
- Mounting by cradle supplied
- Supplied less lamp







Infinity Interior

1 x 250W HQI-T

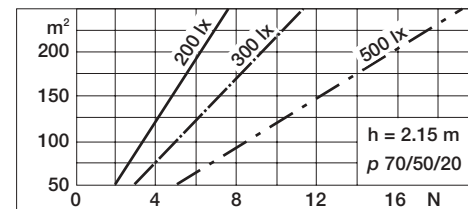



Infinity Interior

1 x 400W HQI-T

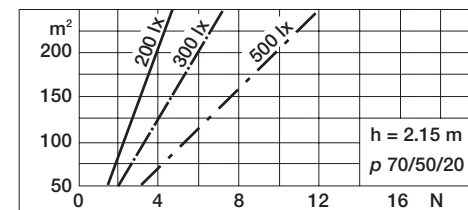



Infinity Interior

1 x 250W SON-T

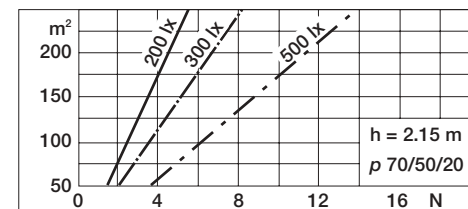


Infinity Interior

1 x 400W SON-T

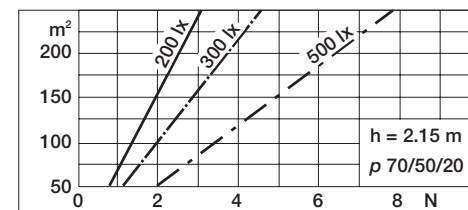

DIMENSIONS



Infinity

ORDER CODES

ADJUSTABLE IP65 ASYMMETRIC HID PROJECTOR

LUMINAIRE	BEZEL COLOUR	LAMP REQUIRED
INF250B	Black	250W HQI-T or SON-T, E40 base
INF400B	Black	400W HQI-T or SON-T, E40 base
INF250S	Silver	250W HQI-T or SON-T, E40 base
INF400S	Silver	400W HQI-T or SON-T, E40 base

To specify state:

Adjustable IP65 asymmetric HQI-T/SON-T projector with black RAL9005 or silver RAL9006 cast aluminium body with integral ballast and P.F.C. capacitor. Luminaire head to pivot through 180° with the safety glass front facing in any position from horizontally downwards to upwards. To incorporate timed ignitor and safety glass – as Whitecroft Lighting INFINITY.

Infinity

MOTIVATION

Infinity - With IP65 ingress protection and a corrosion resistant cast aluminium housing, Infinity is ideal for exterior applications and lends itself to wall or pedestal mounting. The 180° adjustable feature and soft floodlighting delivered by Infinity make it ideal for the direct illumination of large areas such as facades and town squares.


APPLICATION

- Exterior building facades
- Town squares
- Parks
- Town and city beautification schemes

SPECIFICATION

- Lamps:
 - 250W & 400W HQI -T
 - 250W & 400W SON -T
 - All options E40 base
- Adjustable through 180°, with the glass facing horizontally up or down or any position in between
- Body: die cast aluminium
- Finish
 - Black RAL 9005
 - Silver RAL 9006
- Glass: clear safety glass
- Integral control gear with P.F.C. capacitor
- Timed ignitor
- IP65 Ingress Protection
- Mounting by cradle supplied
- Supplied less lamp



DIMENSIONS





NOTE: Order codes same as Infinity Interior





Infinity Exterior
1 x 250W HQI-T

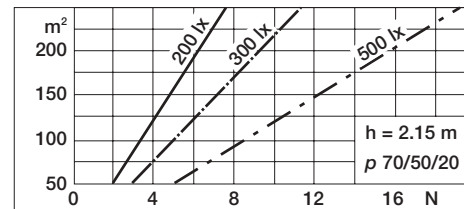



Infinity Exterior
1 x 250W SON-T

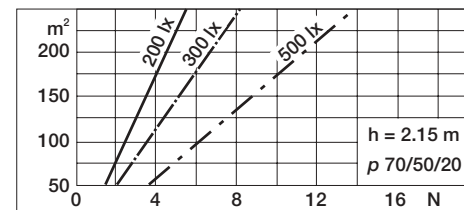

Infinity Exterior
1 x 400W HQI-T

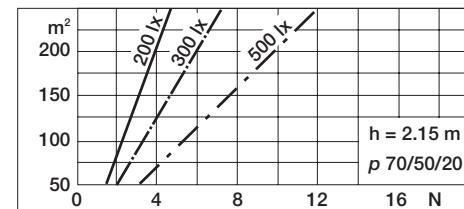

Infinity Exterior
1 x 400W SON-T

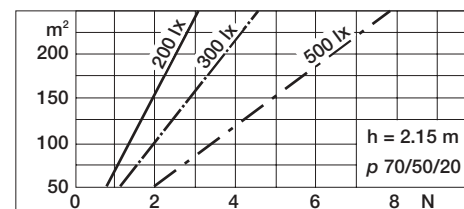

Fin

MOTIVATION

Fin - With integral pole mounting bracket; IP65 ingress protection and die cast aluminium housing, Fin ideally lends itself to a wide range of exterior uses. Its elegant classic lines and high quality appearance assist in enhancing any area not only when in use at night but also in the daytime.


APPLICATION

- Building facades
- Town squares
- Access roads and pathways
- Parks
- Town and city beautification schemes



SPECIFICATION

- Lamps:
 - 70 and 150W CDM-TD all options R7 base
- Finish
 - Black RAL 9005
 - Silver RAL 9006
- Glass: clear safety glass
- Timed ignitor
- Integral pole mounting bracket, see dimensional sketch
- All other details as the interior version



DIMENSIONS



Fin Exterior
1 x 70W CDM-TD

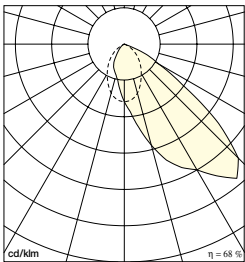

Fin Exterior
1 x 150W CDM-TD

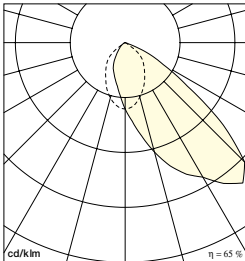

Fin Exterior Pole Mounted

ORDER CODES

(USE INTERIOR PRODUCT CODES FOR WALL MOUNTED)
POLE MOUNTED IP65 ASYMMETRIC HID PROJECTOR FLOODLIGHT

LUMINAIRE	BEZEL COLOUR	LAMP(S) REQUIRED
FIN70PB	Black	70W CDM-TD, R7 base
FIN150PB	Black	150W CDM-TD, R7 base
FIN70PS	Silver	70W CDM-TD, R7 base
FIN150PS	Silver	150W CDM-TD, R7base

To specify state:
IP65 asymmetric CDM-TD pole (76mm diameter) mounted projector floodlight with die cast aluminium body, clear safety glass cover and IP65 ingress protection. Integral ballast with power factor correction and timed ignitor. Body 135mm deep, 210mm wide projecting 390mm in black RAL9005 or silver RAL9006 - as Whitecroft Lighting FIN pole mounted



Whitecroft Lighting Ltd

Burlington Street
Ashton-under-Lyne
Lancashire OL7 0AX
United Kingdom

Telephone: +44 (0)870 5 087 087

Facsimile: +44 (0)870 5 084 210

email@whitecroftlight.com

www.whitecroftlighting.com

Moorlite·Hitech·Simplex