

# florence

direct/indirect bedhead luminaire

> weblink > **FLOR**

## Optics

- Lamp options (1200mm body):
  - 1 x 54W T5 uplighter (ward lighting)
  - 1 x 54W T5 downlighter (reading/nursing care)
- Lamp options (600mm body):
  - 1 x 55W TC-L uplighter (ward lighting)
  - 1 x 55W TC-L downlighter (reading/nursing care light)
- Removable diffusers for both ward and reading/nursing care lights run the full length of the body to optimise light distribution
- Both the ward and reading lamps are independently dimmable by “push control” and function so the following lighting levels can be selected to meet LG2:2008:
  - Patient rest 30-50 Lux
  - Watch light 15-20 Lux
  - Reading 300 Lux
  - General nursing care 300 Lux

## Body

- Extruded aluminium body and full length wall bracket with closed ends finished white
- Wall mounted, recommended mounting height 2m for typical 2.6m-3m ceiling heights
- 1st fix wall bracket, pre-wired to GST 18/4 flying leads



Mounting bracket




End section

## ORDER CODES

| Florence     |                                                  | Standard        |
|--------------|--------------------------------------------------|-----------------|
| T5 2 x 54W   | (one for the ward and one for the reading light) | <b>FLRX5454</b> |
| TC-L 2 x 55W | (one for the ward and one for the reading light) | <b>FLRX5555</b> |

## DIMENSIONS




| Version      | L    | W   | H   | KG   |
|--------------|------|-----|-----|------|
| 2 x 55W TC-L | 580  | 322 | 100 | 7.0  |
| 2 x 54W T5   | 1188 | 322 | 100 | 10.0 |


## LAMP PERFORMANCE

| Wattage      | IL@25°C | Lamp Life |
|--------------|---------|-----------|
| 1 x 54W T5   | 4450    | 24,000hrs |
| 1 x 55W TC-L | 4800    | 20,000hrs |

## TYPICAL 4 BED WARD

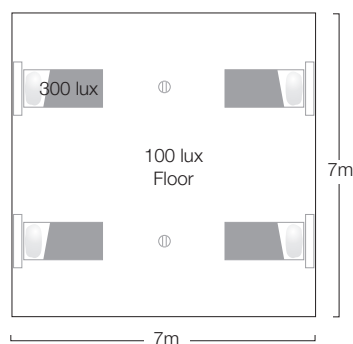

## TYPICAL 1 BED WARD



Ⓜ Nightingale recommended for circulation area lighting

## TO SPECIFY

Direct/Indirect wall mounted hospital bed-head luminaire with 2 x 54W T5 or 2 x 55W TC-L separately switched lamps one lamp providing ward lighting the other reading/nursing care light. Extruded aluminium body and wall bracket with profiled end caps and full length polycarbonate diffusers. Lamps to be independently dimmed by ‘push control’ – as Whitecroft Lighting FLORENCE

