

florence elite

low profile IP40 direct/indirect bedhead luminaire

> weblink > **FLOE**

Optics

- Lamp options:
 - 1 x 39W T5 uplight (ward lighting)
 - 1 x 21W T5 downlight (reading/nursing care)
 - or
 - 10W LED downlight (reading/nursing care)
- Both the ward and reading lamps are independently dimmable by "push control" and function so the following lighting levels can be selected to meet LG2:2008:
 - Patient rest 30-50 Lux
 - Watch light 15-20 Lux
 - Reading 300 Lux
 - General nursing care 300 Lux

Body

- IP40
- Extruded aluminium spine & 'push on' moulded end caps
- One piece membrane diffuser for maximum infection control
- Wall mounted, recommended mounting height 2m for typical 2.6m-3m ceiling heights
- 1st fix wall bracket, pre-wired to GST 18/4 flying leads
- No visible screws and easy/cleaning access to the top of the luminaire




ORDER CODES

Florence Elite	Standard
T5 1 x 39W up/1 x 21W down	FEL3921
T5 1 x 39W up/10W LED down	FEL3910LED

LAMP PERFORMANCE


Wattage	IL@25°C	Lamp Life
1 x 21W T5	1900	24,000hrs
1 x 39W T5	3100	24,000hrs

DIMENSIONS




L	W	H	KG
895	213	95	5.0

TYPICAL 4 BED WARD

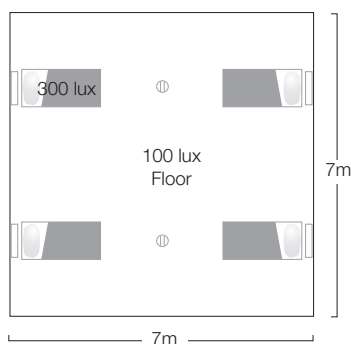

TYPICAL 1 BED WARD



TO SPECIFY

Direct/indirect wall mounted hospital bed head luminaire using T5 lamps or a combination of T5 and LEDs, with separately switched dimmable ward lighting and reading/nursing care light. Easy to clean, IP40 rated extruded aluminium body with one piece infection control diffuser membrane – as Whitecroft Lighting FLORENCE ELITE

Ⓜ Nightingale recommended for circulation area lighting

