

florin 2

recessed LED

> weblink > **FLN2**

- A stand alone white high performance LED emergency luminaire mounted in an aluminium housing complete with charge indicator, driver, charger and battery
- Operated in non-maintained mode
- Open area and escape distribution patterns available. Escape route distribution is especially effective in corridor applications
- Plug and socket feature supplied for easy through wiring
- Insulation Class 2
- Minimum life 50,000 hours
- Ambient temperature range
-15°C to +50°C
- Battery – Nickel Metal Hydride (NiMH)



Florin control module


ORDER CODES

Florin 2

Open area distribution
Escape route distribution

FLN21
FLN22


DIMENSIONS

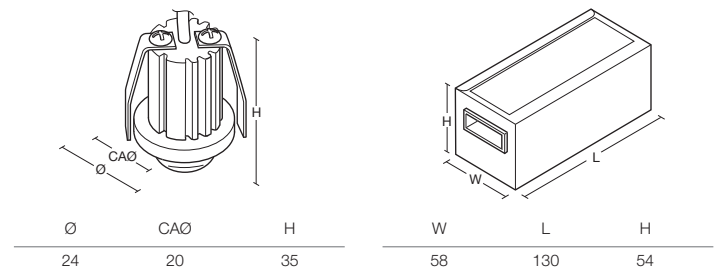

LIGHTING DISTRIBUTION

open area distribution 0.5 lux min

escape route distribution 1.0 lux min

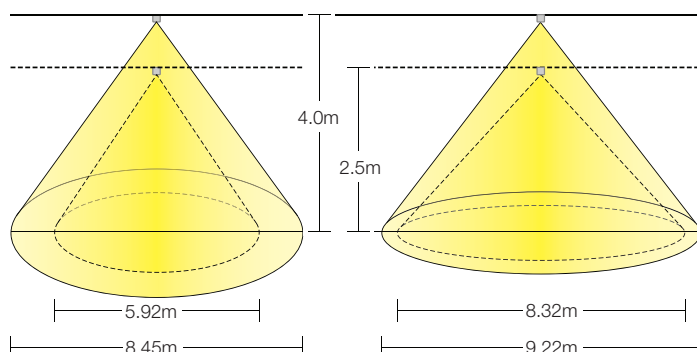

TO SPECIFY

Stand alone white high performance LED emergency luminaire complete with charge indicator, driver, charger and battery capable of operation in non maintained mode. Driver to ensure constant light output independent of battery voltage for 3 hours from mains failure – as Whitecroft Lighting FLORIN 2 LED