

LED line surface

IP66 surface mounted linear LED
luminaire for feature lighting



Optics

- Light output options:
 - 640mm long, 3148 lumens, 30W
 - 1240mm long, 6297 lumens, 60W
 - 1540mm long, 8096 lumens, 77W
- 4000K LED
- Ra80 colour rendition
- Elliptical distribution for even wall-washing
- LED life 60,000 hours to 70% L70B20

Body

- IP66, IK08 protection rated
- Extruded aluminium body with die cast end caps
- Polyester powder coated
- Silver finish
- Tempered glass diffuser
- Surface mounting
- Requires mounting brackets
- Supplied with fitted IP68 connector
- Fixed output LED driver
- Suitable for ambient temperatures between -30 to +40°C

Order Codes

LED Line Surface

640mm, 3148 lumen
1240mm, 6297 lumen
1540mm, 8096 lumen

Fixed Output


LLSH14K
LLSH24K
LLSH34K

Accessories


ADJUSTABLE MOUNTING BRACKETS (PAIR)
IP67 IN LINE CONNECTOR
IP67 TEE CONNECTOR

LLSBKT
MRCL
MRCT

Photometric Performance




60W, 6297 lumen
4000K
• LOR = 100%

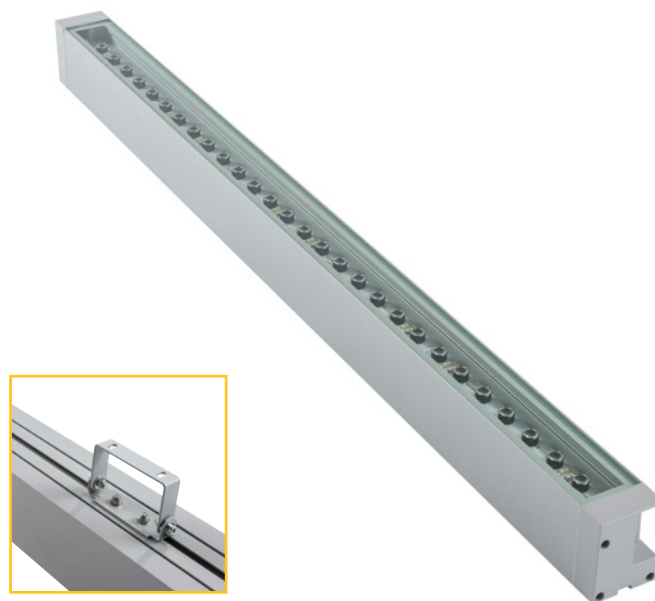

Surface mounting bracket

Dimensions

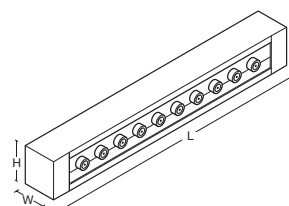

Version	L	H	W	KG
3148 lumen	640	90	70	3.0
6297 lumen	1240	90	70	5.6
8096 lumen	1540	90	70	6.6

LED Performance

Colour Temp	Ra (CRI)	Life Expectancy	Colour Consistency
4000K	≥ 80	L ₇₀ (60,000hrs)	MacAdam 3 SDCM

To Specify

Surface mounted IP66 linear LED luminaire with aluminium housing and elliptical beam distribution. Finished in polyester powder coated silver – as Whitecroft LED LINE SURFACE