

life colour

LED recessed feature lighting system


> weblink > **LIFEC**

Optics

- 12 tri-chip RGB LED configuration
- Polycarbonate Tp(a) diffuser to deliver a solid block of saturated colour
- Positively retained framed diffuser
- One master luminaire unit can be linked to and drive up to 256 slave luminaires

Body

- Steel body finished white
- For installation in exposed T, spring T or plasterboard ceilings

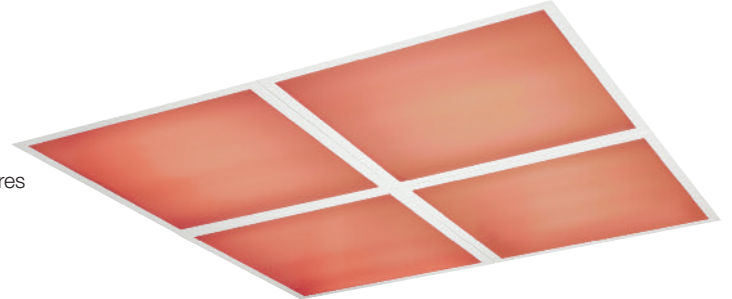

ORDER CODES


Life Colour

LIFE COLOUR MASTER UNIT	12 x 3W LED	LFCM
LIFE COLOUR SLAVE UNIT	12 x 3W LED	LFCS
REMOTE CONTROL		CHLEDSSC
2M COMMUNICATION CABLE*		CHLED2CC

(Longer lengths available on request)

*Note: Each luminaire requires a main supply in addition to the communication cable link

TYPICAL CONFIGURATIONS

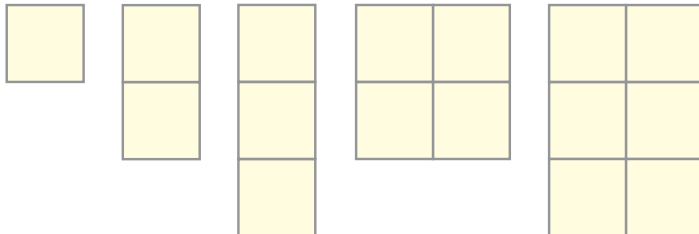

CEILING INTEGRATION

Refer to common ceiling compatibility matrix in the Technical Section

Exposed T Grids

T15/T25 Pull up

Spring T Grids

SAS – 150/120
Armstrong – Orcal 1800/3000
Burgess – Clip in/Abar

Plasterboard


Prepared aperture



Remote Control



DIMENSIONS



L	W	H	L ₁	W ₁	KG
600	600	141	536	536	6.2

TO SPECIFY

Square recessed colour change LED system for feature lighting with lamp image diffusion and steel body – as Whitecroft Lighting LIFE COLOUR