


Optics

- 6 LED RGB strips
- Polycarbonate Tp(a) diffuser to deliver a solid block of saturated colour
- Positively retained framed diffuser
- One master luminaire unit can be linked to and drive up to 15 slave luminaires

Body

- Steel body finished white
- For installation in exposed T, spring T or plasterboard ceilings
- A master kit must be purchased separately to convert standard luminaire into a master unit
- Supplied with each luminaire:
 - 1 Y connector
 - 2 connection cables (2.1m)
- Master kit contents:
 - 1 infra red receiver
 - 1 remote control

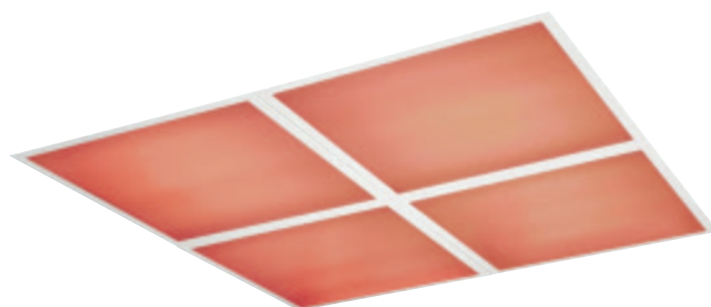

Order Codes


Life Colour

Life colour unit

Life colour master kit

LFC
LFCMASKIT

Typical Configurations

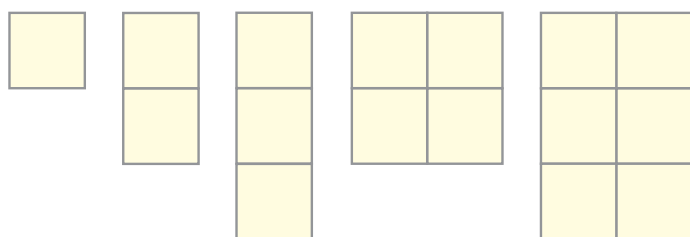

Ceiling Integration

Refer to common ceiling compatibility matrix – See page 404

Exposed T Grids

T15/T25 Pull up


Spring T Grids

SAS – 150/120
Armstrong – Orcal 1800/3000
Burgess – Clip in/Abar

Plasterboard

Prepared aperture -
Cut out 578 x 578mm ± 0.5
For multiple configurations please contact the Technical Desk

Dimensions

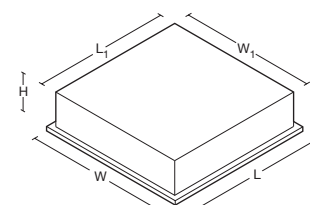

L	W	H	L ₁	W ₁	KG
600	600	141	536	536	6.0



To Specify

Square recessed colour change LED system for feature lighting with lamp image diffusion and steel body – as Whitecroft Lighting LIFE COLOUR