

life P

recessed picture lighting system

> weblink > **LIFEP**

Optics

- Lamp options:
 - 3 x 24W T5
- Polycarbonate TP(a) diffuser, with printed image (order separately)
- A selection of images are available to enhance and define the space
- Positively retained framed diffuser
- IP40

Body

- Steel body finished white
- For installation in exposed T, spring T or plasterboard ceilings



ORDER CODES

Life P (Body Only)

T5 3 x 24W

HF Gear

LFPH324BD

Printed Diffuser

Configuration C1 and sky image

i.e. LFPC1-PA

Alternative configurations: Replace C1 with C2 – C6 depending on configuration required

Alternative images: Replace PA with PB, PX or PY depending on picture required

e.g. To order C6 with Autumn you must order: 6 off LFPH324BD
1 off LFPC6-PB

LAMP PERFORMANCE

Wattage	IL@25°C	Lamp Life
1 x 24W T5	1750	24,000hrs

CEILING INTEGRATION

Refer to common ceiling compatibility matrix in the Technical Section

Exposed T Grids

T15/T25 Pull up

Spring T Grids

SAS – 150/120
Armstrong – Orcal 1800/3000
Burgess – Clip in/Abar

Plasterboard

Prepared aperture

PRINTED IMAGES


Sky



Autumn




Atrium 1




Atrium 2



TYPICAL CONFIGURATIONS

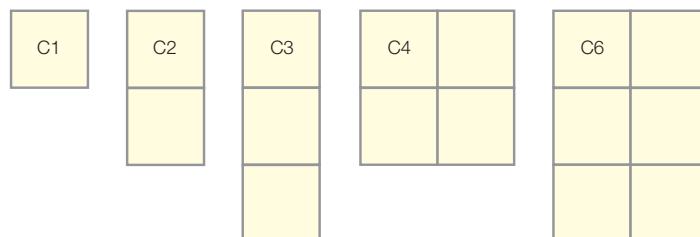

DIMENSIONS



L	W	H	L ₁	W ₁	KG
600	600	141	536	536	5.9

TO SPECIFY

Square recessed fluorescent luminaire system for feature lighting, with printed diffuser and steel body – as Whitecroft Lighting LIFE P

